

Practical examples of ordering

SITRANS F M compact installation




Example

Sensor	7ME6310-3TC11-1JA1
Pipe size	DN 100
Liner	Soft rubber
Electrodes	SS 316
Flanges	EN 1092-1, PN 16
Transmitter	MAG 6000, Polyamide, 115 ... 230 V AC
Accuracy	$\pm 0.2 \% \pm 1 \text{ mm/s}$
Supply	230 V AC

Note:

MAG 5000/6000 transmitters, sensors and communication modules are packed in separate boxes, the final assembly takes place during installation at the customer's place.

SITRANS F M remote installation

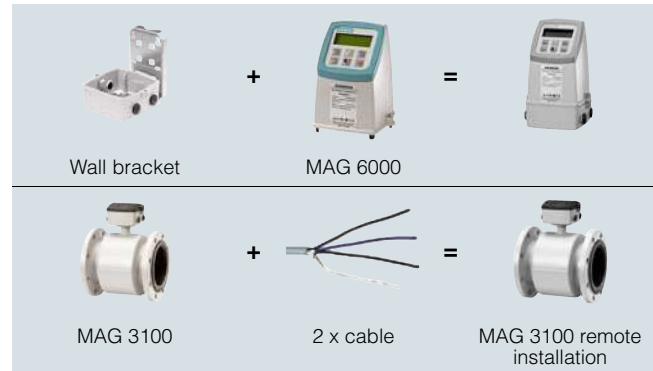

Example

Sensor	7ME6310-3TC11-1AA1
Pipe size	DN 100
Liner	Soft rubber
Electrodes	SS 316
Flanges	EN 1092-1, PN 16
Transmitter	7ME6920-1AA10-0AA0
Accuracy	$\pm 0.2 \% \pm 1 \text{ mm/s}$
Supply	230 V AC
Wall mounting kit	FDK:085U1018
Cable kit with sensor cable and electrode cable	A5E01181647

Flow Measurement

SITRANS F M

System information SITRANS F M Electromagnetic flowmeters

Technical specifications

Flowmeter Calibration and traceability

To ensure continuous accurate measurement, flowmeters must be calibrated. The calibration is conducted at Siemens flow facilities with traceable instruments referring directly to the physical unit of measurement according to the International System of Units (SI).

Therefore, the calibration certificate ensures recognition of the test results worldwide, including the US (NIST traceability).



Siemens offers accredited calibrations assured to ISO 17025 in the flow range from 0.0001 m³/h to 10 000 m³/h.

The calibration follows the ISO 4185 performing calibrations under two methods: Static Weighing and Reference meter. Providing a measurement uncertainty of $\pm 0.1\%$.

Siemens Flow Instruments accredited laboratories are recognized by ILAC MRA (International Laboratory Accreditation Corporation - Mutual Recognition Arrangement) ensuring international traceability and recognition of the test results worldwide.

A calibration certificate is shipped with every sensor and calibration data are stored in the SENSORPROM memory unit.

Flowmeter uncertainty

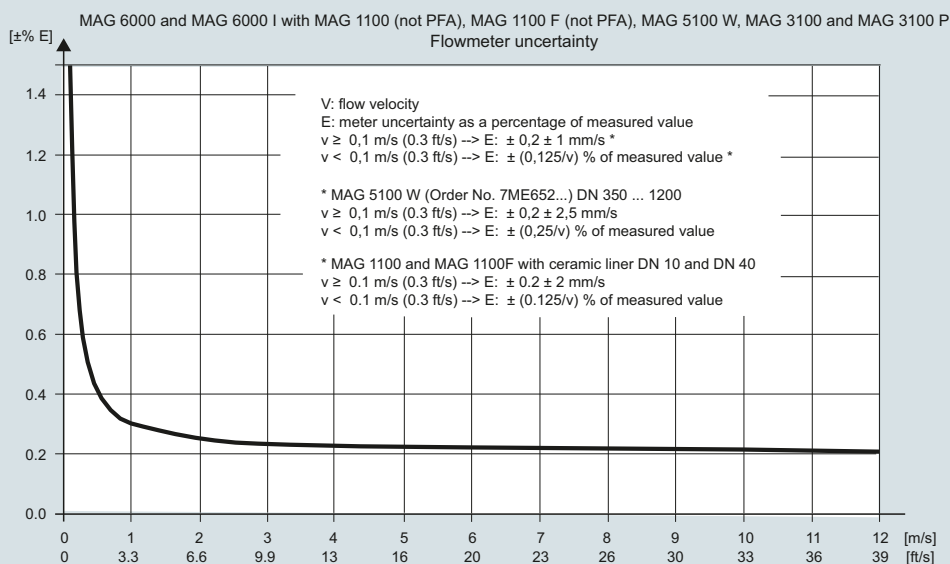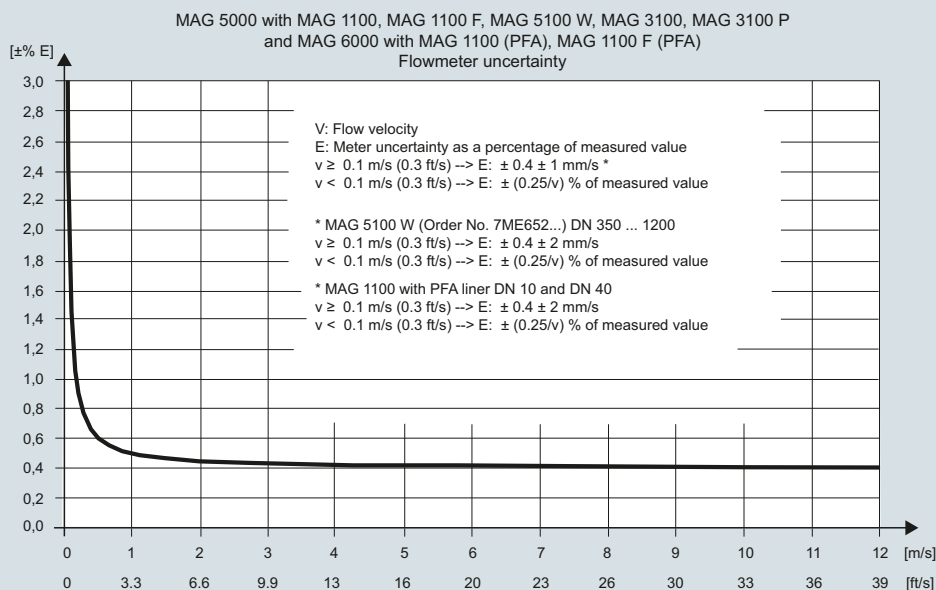

Calibration reference conditions
Reference conditions (ISO 9104 and DIN EN 29104)

Temperature medium	20 °C ± 10 K (68 °F ± 18 °F)
Temperature ambient	25 °C ± 10 K (77 °F ± 18 °F)
Supply voltage	$U_n \pm 1\%$
Warming-up time	30 minutes
Incorporation in conductive pipe section	
• Inlet section	10 x DN (DN ≤ 1200/48") 5 x DN (DN > 1200/48")
• Outlet section	5 x DN (DN ≤ 1200/48") 3 x DN (DN > 1200/48")
Flow conditions	Developed flow profile

Additions in the event of deviations from reference conditions

Current output	As pulse output ($\pm 0.1\%$ of actual flow + 0.05 % FSO)
Effect of ambient temperature	
• Display / frequency / pulse output	< $\pm 0.003\%$ /K act.
• Current output	< $\pm 0.005\%$ /K act.
Effect of supply voltage	< 0.005 % of measuring value on 1% change
Repeatability	$\pm 0.1\%$ of actual flow for $v \geq 0.5$ m/s (1.5 ft/s) and conductivity > 10 μ S/cm

Certificates

• EN 10204-2.1	Certificate of conformity, stating that the delivered parts are made of the material quality that was ordered. Available as Z option C15.
• EN 10204-2.2	Test report certificate, a non batch specific material analysis of the ordered material. Available as Z option C14.
• EN 10204-3.1	Material analysis certificate, a batch specific analysis of the material issued by an independent inspector. Certification covers all pressure containing and wetted parts. Available as Z option C12.



Flow Measurement

SITRANS F M

System information SITRANS F M Electromagnetic flowmeters

Technical specifications

General specifications

PROFIBUS device profile	3.00 Class B
Certified	No
MS0 connections	1
MS1 connections	1
MS2 connections	2

Electrical specification DP

Physical layer specifications

Applicable standard	IEC 61158/EN 50170
Physical Layer (Transmission technology)	RS 485
Transmission speed	≤ 1.5 Mbits/s
Number of stations	Up to 32 per line segment, (maximum total of 126)

Cable specification (Type A)

Cable design	Two-wire twisted pair
Shielding	CU shielding braid or shielding braid and shielding foil
Impedance	35 up to 165 Ω at frequencies from 3 ... 20 MHz
Cable capacity	< 30 pF per meter
Core diameter	> 0.34 mm ² , corresponds to AWG 22
Resistance	< 110 Ω per km
Signal attenuation	Max. 9 dB over total length of line section
Max. bus length	200 m at 1500 kbit/s, up to 1.2 km at 93.75 kbit/s. Extendable by repeaters

Electrical specification PA

Physical layer specifications

Applicable standard	IEC 61158/EN 50170
Physical Layer (Transmission technology)	IEC-61158-2
Transmission speed	31.25 Kbits/second
Number of stations	Up to 32 per line segment, (maximum total of 126)
Max. basic current [I_B]	14 mA
Fault current [I_{FDE}]	0 mA
Bus voltage	9 ... 32 V (non Ex)

Preferred cable specification (Type A)

Cable design	Two-wire twisted pair
Conductor area (nominal)	0.8 mm ² (AWG 18)
Loop resistance	44 Ω /km
Impedance	100 $\Omega \pm 20 \%$
Wave attenuation at 39 kHz	3 dB/km
Capacitive asymmetry	2 nF/km
Bus termination	Passive line termination at both
Max. bus length	Up to 1.9 km. Extendable by repeaters

IS (Intrinsic Safety) data

Required sensor electronics	Compact or remote mounted SITRANS F M MAG 6000 I Ex
FISCO	Yes
Max. U_I	17.5 V
Max. I_I	380 mA
Max. P_I	5.32 V
Max. L_I	0 μ H
Max. C_I	0 nF

FISCO cable requirements

Loop resistance R_C	15 ... 150 Ω /km
Loop inductance L_C	0.4 ... 1 mH/km
Capacitance C_C	80 ... 200 nF/km
Max. Spur length in IIC and IIB	30 m
Max. Trunk length in IIC	1 km
Max. Trunk length in IIB	5 km

PROFIBUS parameter support

The following parameters are accessible using a MS0 relationship from a Class 1 Master.
MS0 specifies cyclic Data Exchange between a Master and a Slave.

Cyclic services

Input (Master view)	Parameter	MAG 6000/MAG 6000 I
	Mass flow	
	Volume flow	✓
	Temperature	
	Density	
	Fraction A	
	Fraction B	
	Pct Fraction A	
	Totalizer 1	✓
	Totalizer 2 ¹⁾	✓
	Batch progress ¹⁾	✓
	Batch setpoint	✓
	Batch compensation	✓
	Batch status (running ...)	✓
Output (Master view)	Set Totalizer 1+2	✓
	Set Mode Totalizer 1+2	✓
	Batch control (start, stop ...)	✓
	Batch setpoint	✓
	Batch compensation	✓

¹⁾ Value returned is dependent on the BATCH function.


When ON, Batch progress is returned.

When OFF, TOTALIZER 2 is returned.



Flow and speed chart

Metric

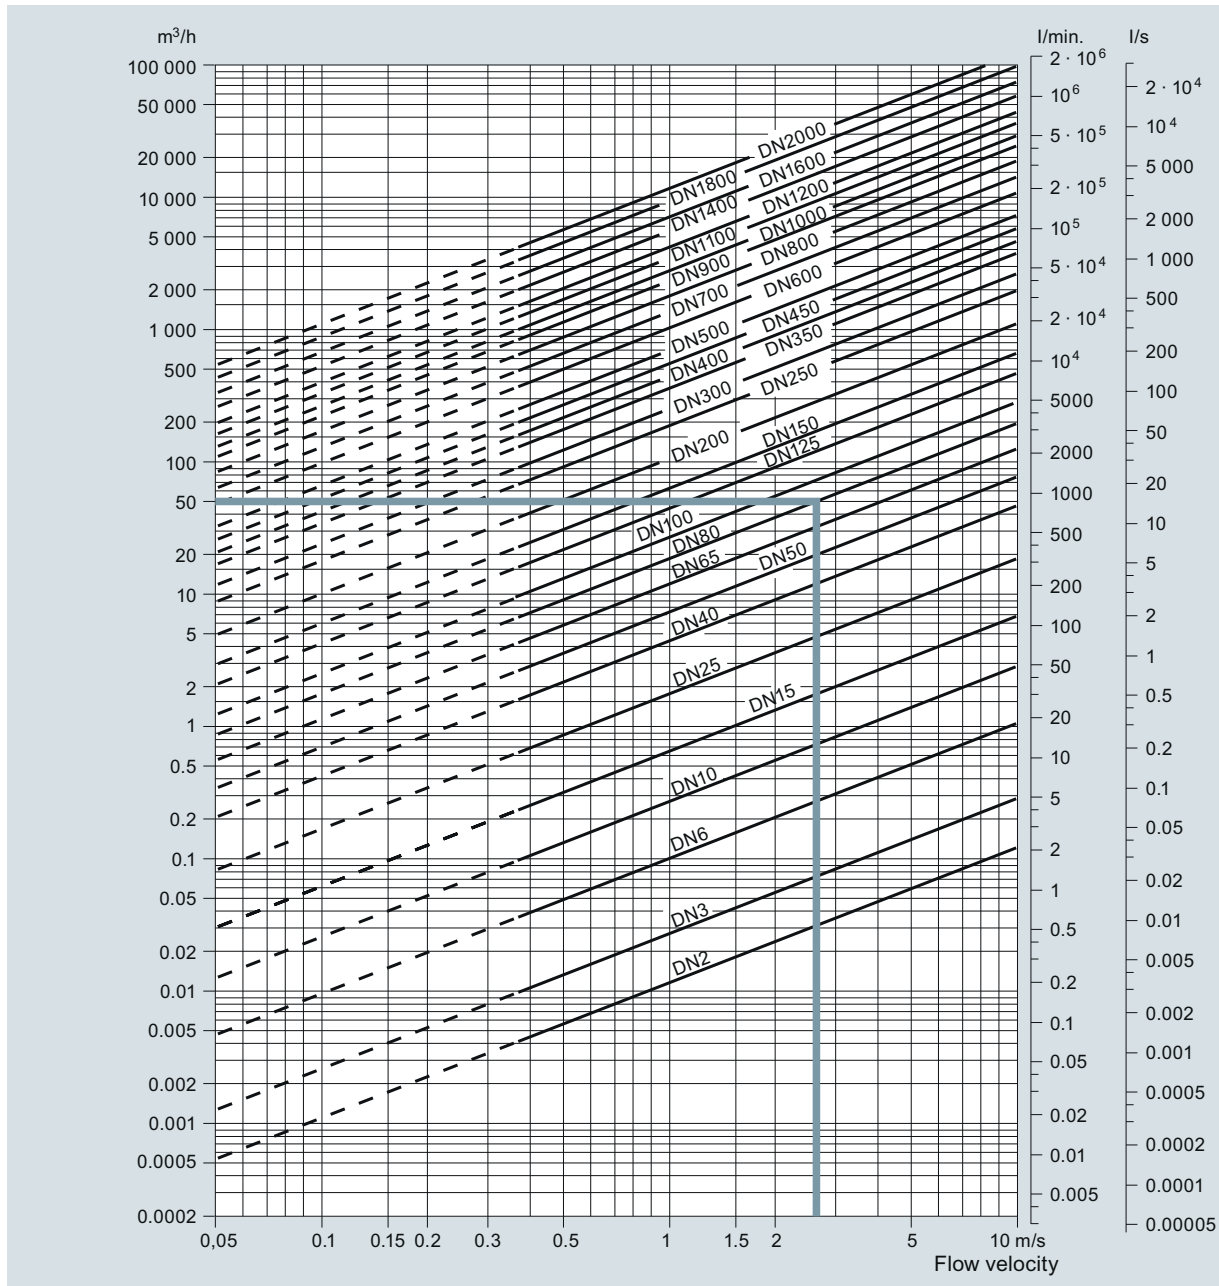

Sizing table (DN 2 ... DN 2000)

The table shows the relationship between flow velocity v , flow quantity Q and sensor dimension DN.

Guidelines for selection of sensor

Min. measuring range: 0 to 0.25 m/s

Max. measuring range: 0 to 10 m/s

Normally the sensor size is selected so that the nominal flow velocity v lies within the recommended measuring range of 1 to 3 m/s.

Example:

Flow quantity of 50 m³/h and a sensor dimension of DN 80 gives a flow velocity of 2.7 m/s, which is within the recommended measuring range of 1 to 3 m/s.

Flow velocity calculation formula Units

$$v = 1273.24 \cdot Q / DN^2 \text{ or}$$

$$v = 353.68 \cdot Q / DN^2$$

$$v : [\text{m/s}], Q : [\text{l/s}], DN : [\text{mm}]$$

$$v : [\text{m/s}], Q : [\text{m}^3/\text{h}], DN : [\text{mm}]$$

Link to "Sizing program":


<https://pia.khe.siemens.com/index.aspx?nr=11501>

Flow Measurement

SITRANS F M

System information SITRANS F M Electromagnetic flowmeters

Imperial

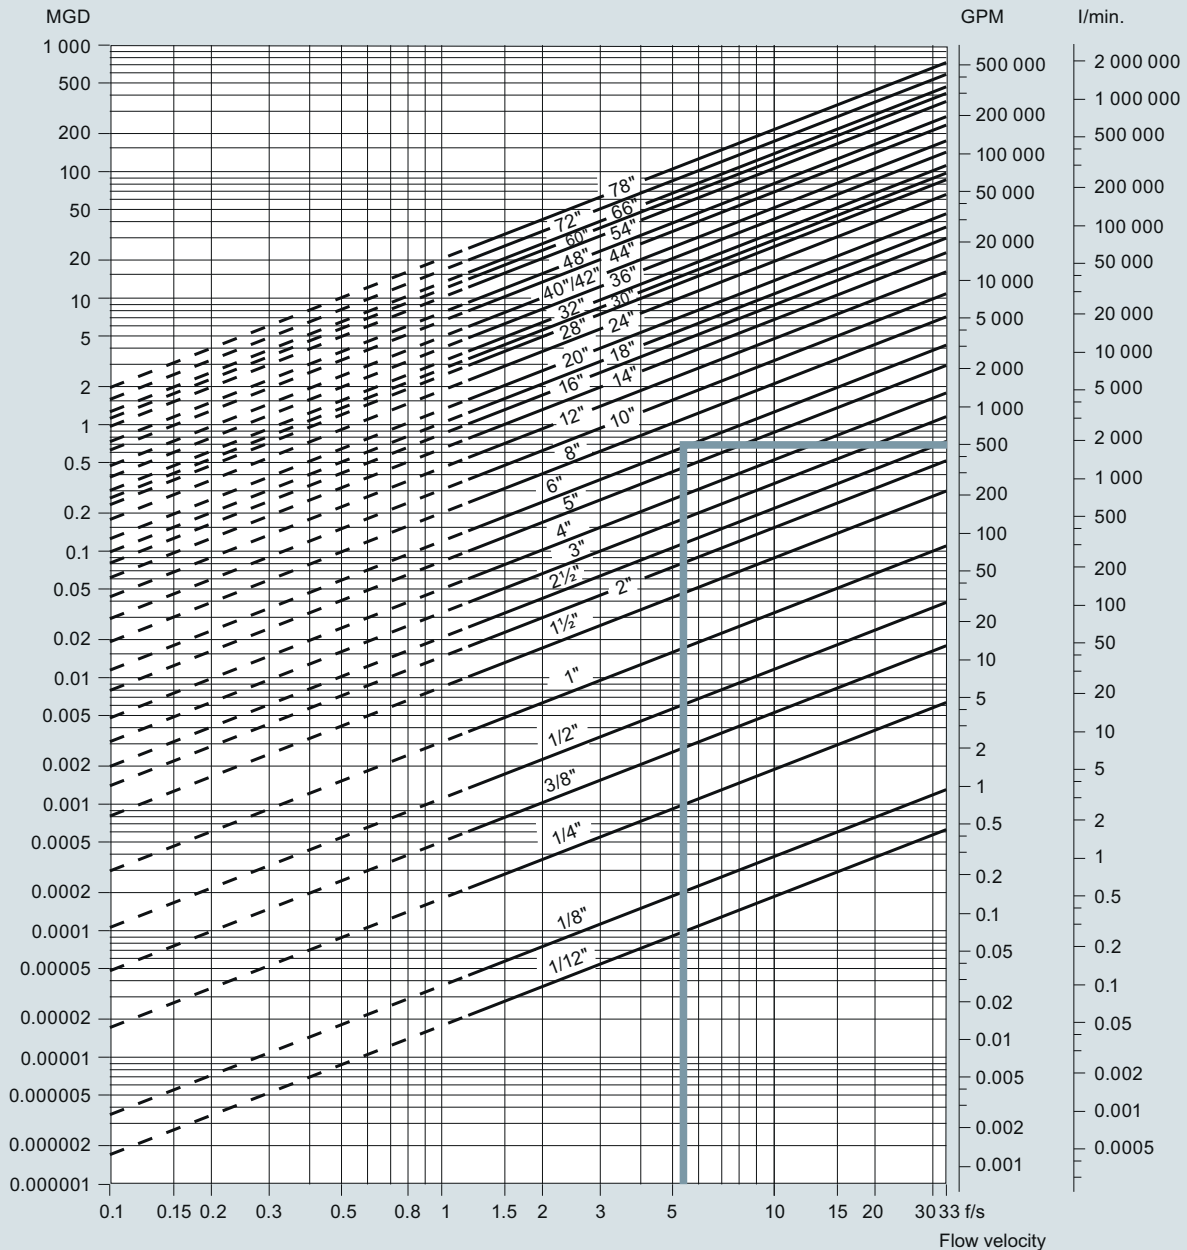

Sizing table ($1/12''$... 78'')

The table shows the relationship between flow velocity v , flow quantity Q and sensor dimension size.

Guidelines for selection of sensor

Min. measuring range: 0 to 0.8 ft/s

Max. measuring range: 0 to 33 ft/s

Normally the sensor size is selected so that the nominal flow velocity v lies within the measuring range 3 to 10 ft/s.

Example:

Flow quantity of 500 GPM and a sensor dimension of 6" gives a flow velocity of 5.6 ft/s, which is within the recommended measuring range of 3 to 10 ft/s.

Flow velocity calculation formula Units

$$v = 0.408 \cdot Q / (\text{Pipe I.D.})^2 \text{ or } v = 283.67 \cdot Q / (\text{Pipe I.D.})^2$$

$$v = 0.408 \cdot Q / (\text{Pipe I.D.})^2 \text{ or } v = 283.67 \cdot Q / (\text{Pipe I.D.})^2$$

Link to "Sizing program":

<https://pia.khe.siemens.com/index.aspx?nr=11501>




System information SITRANS F M Electromagnetic flowmeters

Installation conditions


Vibrations

Strong vibrations should be avoided.

In applications with strong vibrations, remote mounting of the transmitter is recommended.

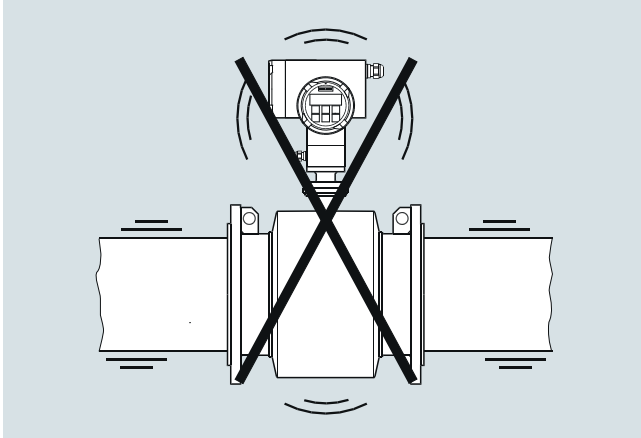



The sensor must always be completely filled with liquid.

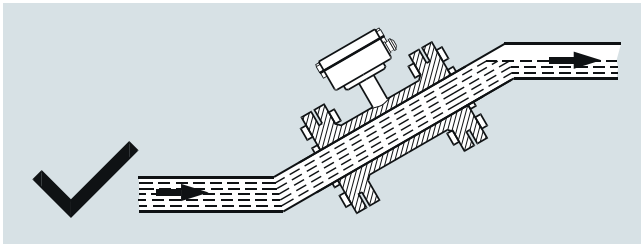

Install in pipelines which are always full


The sensor must always be completely filled with liquid. Therefore avoid:

- Installation at the highest point in the pipe system
- Installation in vertical pipes with free outlet

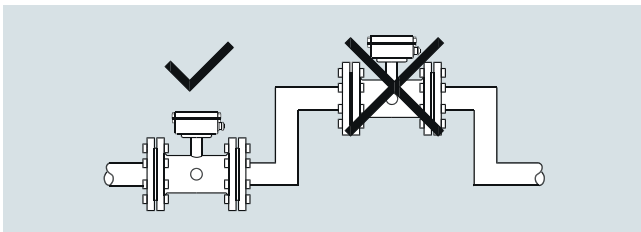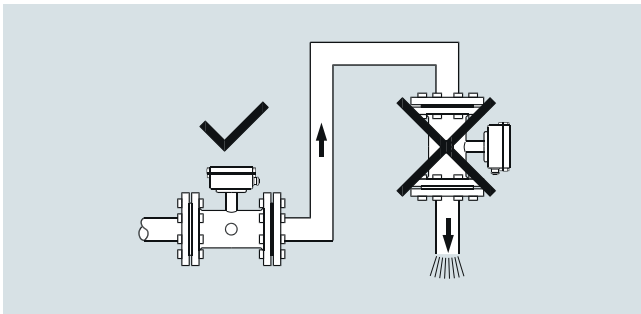

Do not install in pipelines which can run empty


For partially filled pipes or pipes with downward flow and free outlet the flowmeter should be located in a U-Tube.

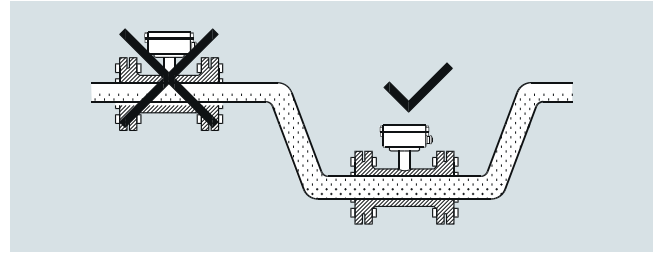

Install in U-tubes when pipe is partially filled

Installation in vertical pipes


Recommended flow direction: upwards. This minimizes the effect on the measurement of any gas/air bubbles in the liquid.

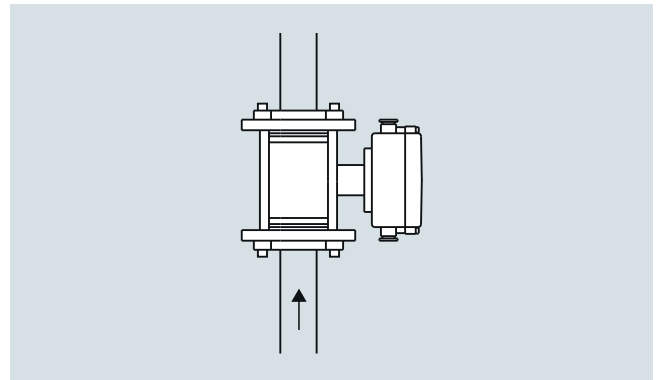

Install in vertical pipes with upward flow direction

Installation in horizontal pipes

The sensor must be mounted as shown in the below figure. Do not mount the sensor as shown in the lower figure. This will position the electrodes at the top where there is possibility for air bubbles and at the bottom where there is possibility for mud, sludge, sand etc.

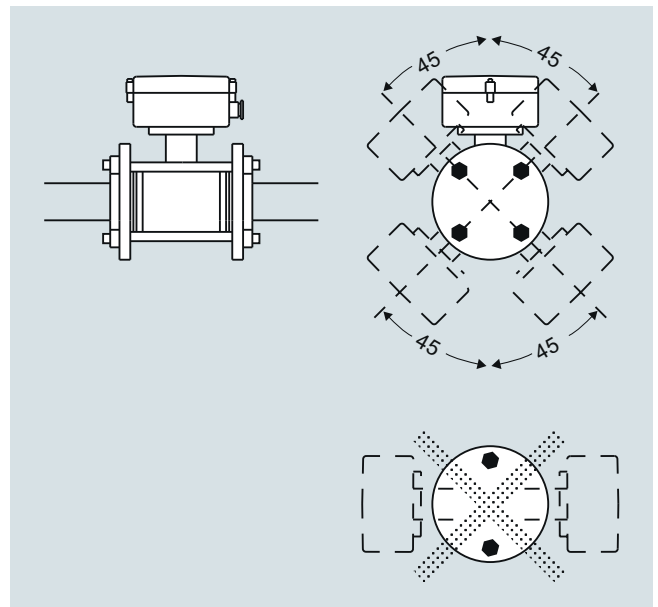


Flow Measurement

SITRANS F M

System information SITRANS F M Electromagnetic flowmeters


Measuring abrasive liquids and liquids containing particles

Recommended installation is in a vertical/inclined pipe to minimize the wear and deposits in the sensor.

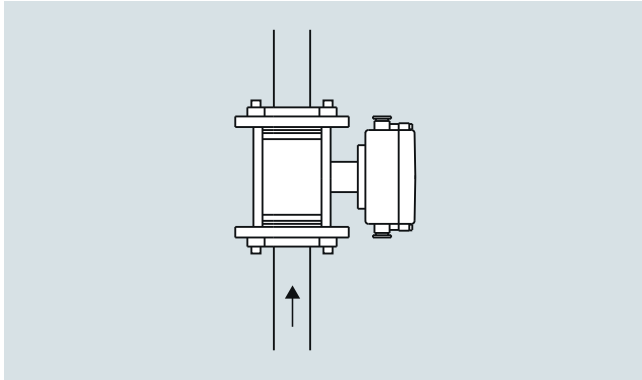

Install in vertical pipelines with upward flow direction if measuring abrasive liquids

Inlet and outlet conditions

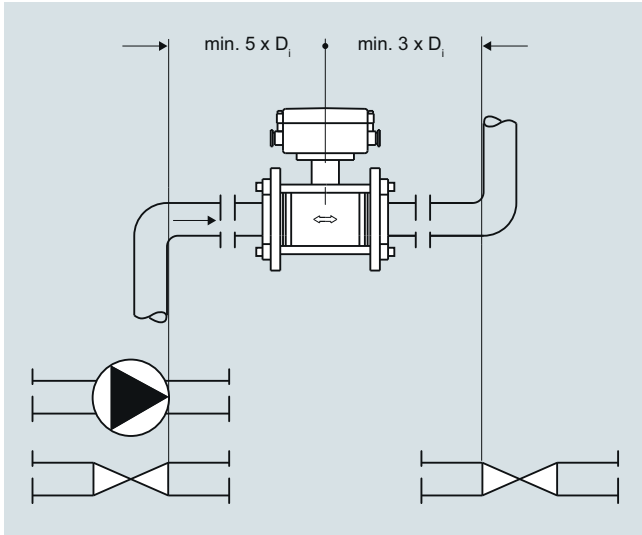

Recommended straight pipe lengths up and downstream for installations between elbows, pumps and valves.


To achieve maximum accurate flow measurement it is essential to have straight pipe lengths up and downstream. Practical experience has proved that the MAG 5100 W and MAG 8000 are capable to operate in non-optimal piping arrangements and still provide acceptable accuracy even with zero diameters up-stream and downstream of straight run pipe.

It is also important to center the flowmeter in relation to pipe flange and gaskets.

Ambient temperature-Installation

Temperature changes can cause expansion or contraction in the pipe system. To avoid damage on the sensor use of proper gasket and torque should be ensured. For more information see sensor instruction.

Potential equalization

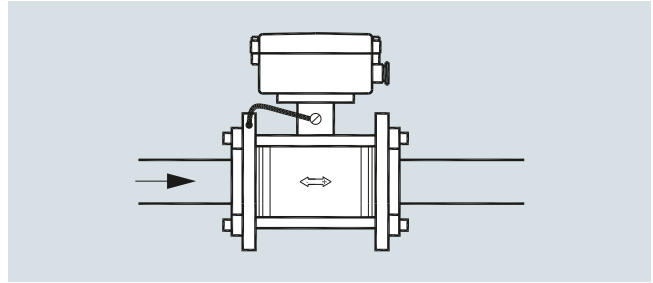


Potential equalization


The electrical potential of the liquid must always be equal to the electrical potential of the sensor. This can be achieved in different ways depending on the application:

- Wire jumper between sensor and adjacent flange (MAG 1100, MAG 3100)
- Direct metallic contact between sensor and fittings (MAG 1100 F)
- Built-in grounding electrodes (MAG 3100, MAG 5100 W)
- Optional grounding/protection flanges/rings (MAG 1100, MAG 3100, MAG 8000)
- Optional graphite gaskets on MAG 1100 (standard for MAG 1100 High Temperature)
- MAG 8000 installed in plastic or coated pipes: two grounding rings to be used.


Grounding

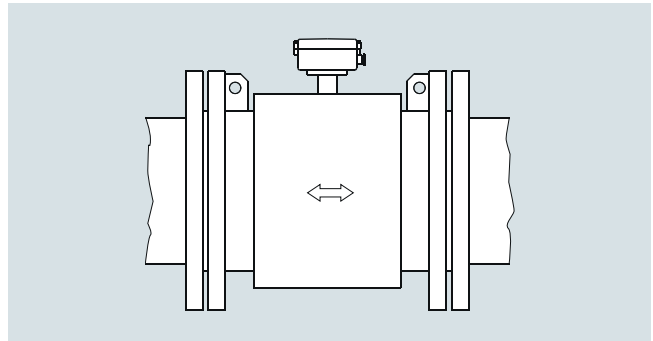

MAG 3100 and MAG 5100 W: with grounding electrodes in conductive and non-conductive pipes (no further action necessary)

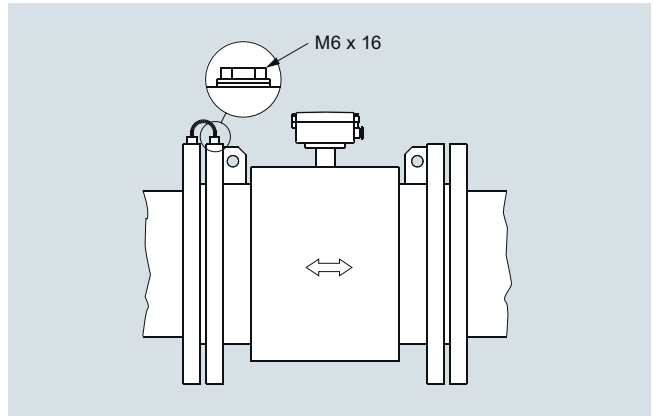


MAG 1100 and MAG 3100: without grounding electrodes in conductive pipes (MAG 1100 use graphite gasket)

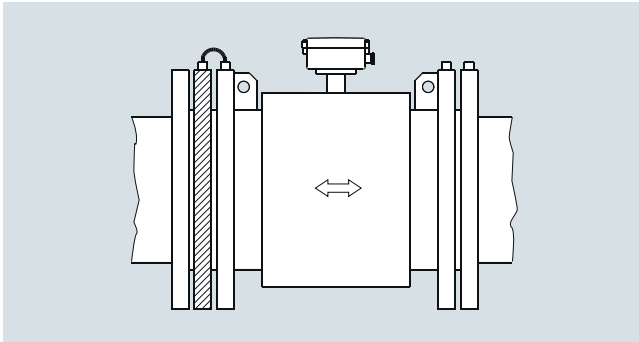

Without grounding electrodes in non-conductive pipes use grounding ring (MAG 1100 use graphite gasket)


MAG 1100 F grounding via process connections. MAG 8000 grounding see MAG 8000 pages.

Vacuum

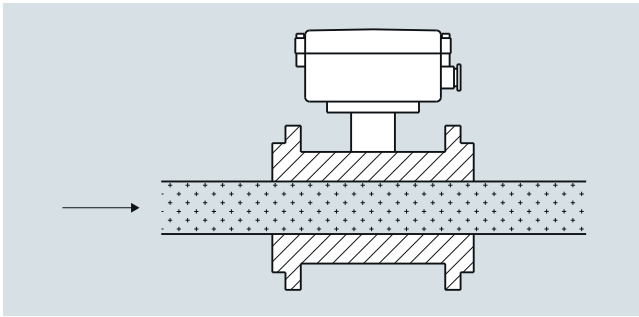


In order to prevent damages of liner when operating meters under vacuum please take note of the information "Operating pressure" given in section "Technical specification".

Installation in large pipes

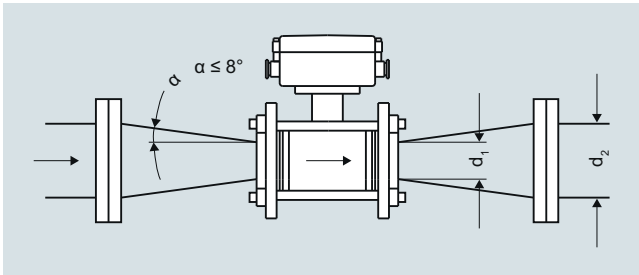

Reduction in nominal pipe diameter

The flowmeter can be installed between two reducers (e.g. DIN 28545). Assuming that at 8° the following pressure drop curve applies. The curves are applicable to water.

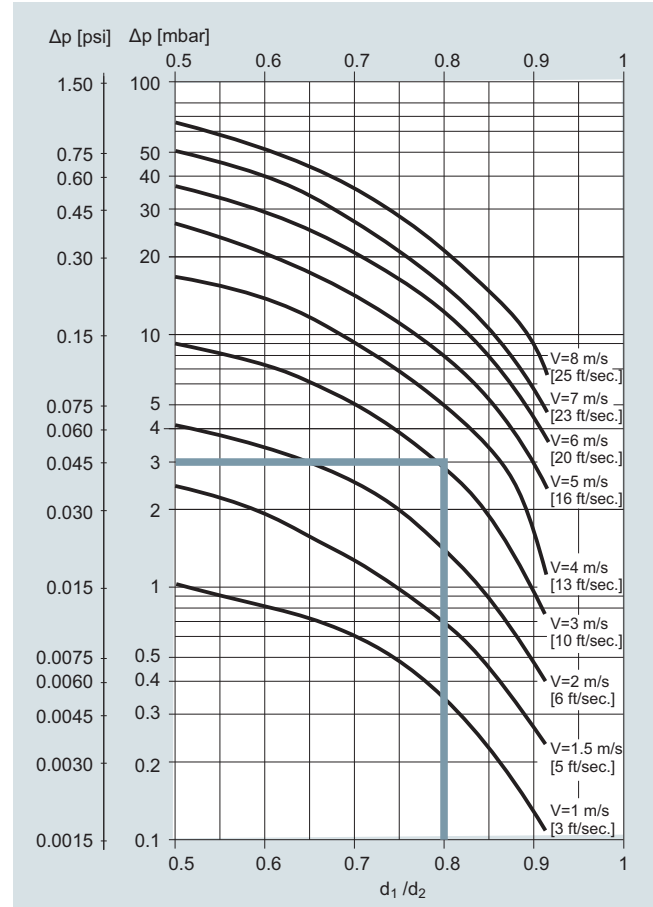


Pressure drop as function of diameter reduction between reducers

Example:

Flow velocity (v) of 3 m/s (10 ft/s) in a sensor with a diameter reduction DN 100 (4") to DN 80 (3") ($d_1/d_2 = 0.8$) gives a pressure drop of 2.9 mbar (0.04 psi).

Ambient temperature

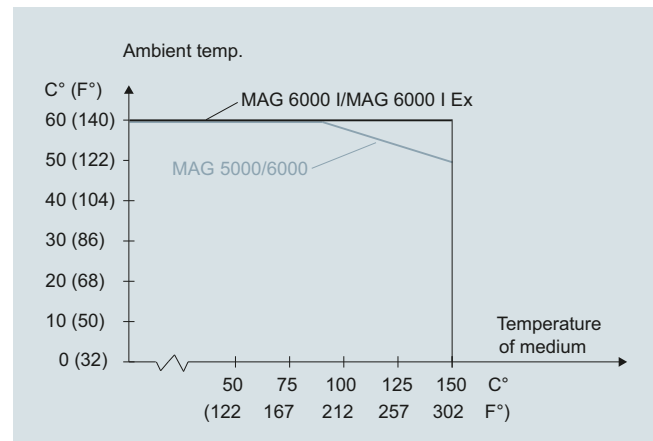

Max. ambient temperature as a function of temperature of medium

The transmitter can be installed either compact or remote.

With compact installation the temperature of medium must be according to the graph.

Flow Measurement


SITRANS F M

System information SITRANS F M Electromagnetic flowmeters


Sensor cables and conductivity of medium

Compact installation:


Liquids with an electrical conductivity $\geq 5 \mu\text{S/cm}$.

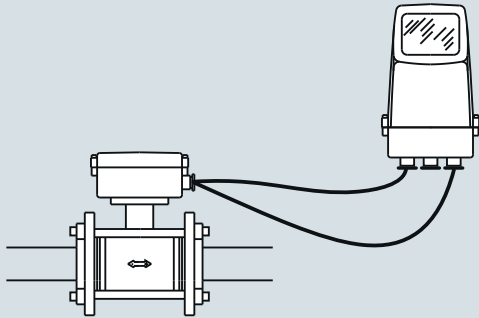

Remote installation

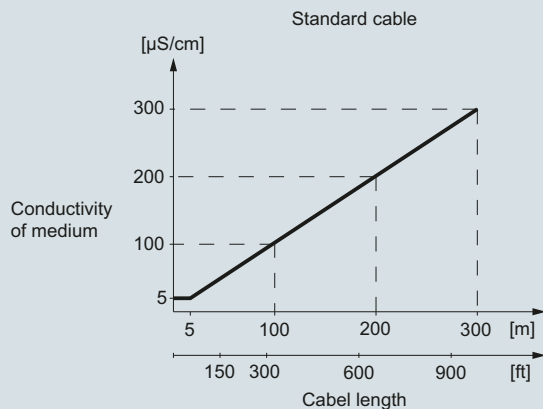

Minimum conductivity of medium (using standard electrode cable)

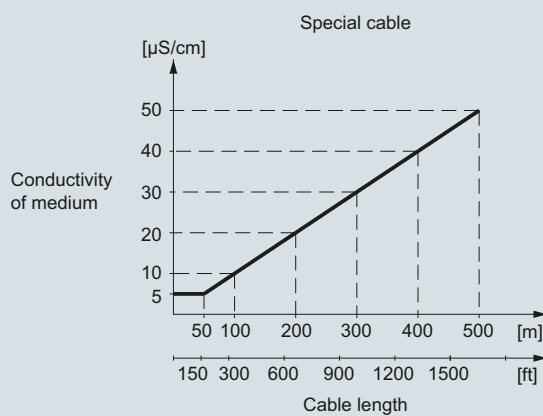

Minimum conductivity of medium (using special electrode cable)

Empty pipe detection

The installation has to fulfill the following limitations for usage of the empty pipe detection function:

- media conductivity $\geq 20 \mu\text{S/cm}$
- length of cable at remote installation $\leq 50 \text{ m}$ (150 ft)
- special shield cable must be used

Note for MAG 1100 sizes DN 2 and DN 3:

- empty pipe detection is not available
- the media conductivity must be $\geq 30 \mu\text{S/cm}$

Note for MAG 5000/6000 CT:

- empty pipe detection is not available



Function

All electromagnetic flowmeters are based on Faraday's law of induction:

$$U_M = B \cdot v \cdot d \cdot k$$


U_M = Measured voltage induced in the medium perpendicular to the magnetic field and the flow direction. The voltage is tapped at two point electrodes.

B = Magnetic flux density which permeates the flowing medium perpendicular to the flow direction.

v = flow velocity of medium

d = internal diameter of metering tube

k = proportionality factor or sensor constant

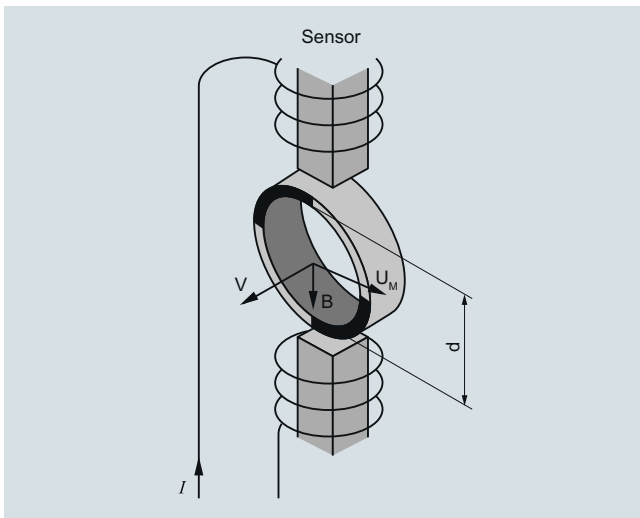

Function and measuring principle of electromagnetic measurement

An electromagnetic flowmeter generally consists of a magnetically non-conducting metering tube with an internal electrically non-conducting surface, magnet coils connected in series and mounted diametrically on the tube, and at least two electrodes which are inserted through the pipe wall and are in contact with the measured medium. The magnet field coils through which the current passes generate a pulsed electromagnetic field with the magnetic flux density B perpendicular to the pipe axis.

This magnetic field penetrates the magnetically non-conducting metering tube and the medium flowing through it, which must have a minimum electrical conductivity.

According to Faraday's law of induction, a voltage U_M is generated in an electrically conducting medium, and is proportional to the flow velocity v of the medium, the magnetic flux density B , and the distance between the electrodes d (internal diameter of pipe).

The signal voltage U_M is tapped by the electrodes which are in contact with the medium, and passed through the insulating pipe wall. The signal voltage U_M which is proportional to the flow velocity is converted by an associated transmitter into appropriate standard signals such as 4 to 20 mA.

SITRANS F M diagnostics

The diagnostic functions are all internal tools in the meter:

- Identification in clear text and error log
- Error categories: function; warning; permanent and fatal errors
- Transmitter self-check including all outputs and the accuracy
- Sensor check: coil and electrode circuit test
- Overflow
- Empty pipe: partial filling; low conductivity; electrode fouling

SITRANS F M Verificator (MAG 5000 and 6000)

The SITRANS F M Verificator is an external tool designed for MAG 5000 and MAG 6000 with MAG 1100, MAG 1100 F, MAG 3100, MAG 3100 P or MAG 5100 W sensors to verify the entire product, the installation and the application.

The goal is to improve operation, reduce downtime and maintain measurement accuracy as long as possible.

The SITRANS F M Verificator is highly advanced and carries out the complex verification and performance check of the entire flowmeter system, according to unique Siemens patented principles. The whole verification test is automated and easy to operate so there is no opportunity for human error or influence. The system is traceable to international standards and tested by WRc (Water Research Council).



SITRANS F M Verificator

- Stand alone Verificator to measure a number of selected parameters in the flow sensor and a transmitter which affects the integrity of the flow measurement
- Up to 20 measurements can be stored in the Verificator
- The Verificator can be connected via a serial cable to a PC enabling download of the data. A Windows program enables printing and management of verificator reports.

Verification - Steps

Verification of a SITRANS F M flowmeter consists of the following test routines:

1. Transmitter test
2. Flowmeter and cable insulation test
3. Sensor magnetism test

Flow Measurement

SITRANS F M

SITRANS F M Vericator

1. Transmitter test

The transmitter test is the traditional way of on-site testing on the market and checks the complete electronic system from signal input to output.




Transmitter test

Using the excitation power output, which is generated to drive the magnetic field of the sensor, the vericator simulates flow signal to the transmitter input. By measuring the transmitter outputs the vericator calculates its accuracy against defined values. Test includes:

- Excitation power to drive the magnetic field
- Signal function from signal input to output
- Signal processing – gain, offset and linearity
- Test of analogue and frequency output

2. Insulation test




Flowmeter insulation test

The verification test of the flowmeter insulation is a „cross talk“ test of the entire flowmeter which ensures that the flow signal generated in the sensor is not affected by any external influences.

In the "cross-talk" test the vericator generates a high voltage disturbance within the coil circuit and then looks for any "cross-talk" induced in the flow signal circuit. By generating dynamic disturbances close-coupled to the flow signal, the flowmeter is tested for noise immunity to a maximum level:

- EMC influence on the flow signal
- Moisture in sensor, connection and terminal box
- Non-conductive deposit coating the electrodes within the sensor
- Missing or poor grounding, shielding and cable connection.

3. Sensor magnetism test



Sensor magnetism test

The verification of the sensor magnetism is a "boost" test of the magnetic field coil. The test ensures that the magnetism behaviour is like the first time, by comparing the current sensor magnetism with the "fingerprint" which was determined during initial calibration and stored in the SENSORPROM memory unit. In the "boost" test the vericator changes the magnetic field in certain pattern and with high voltage to get quick stable magnetic condition. This unique test is fulfilled without any interference or compensation of surrounding temperature or interconnecting cabling.

- Changes in dynamic magnetic behaviour
- Magnetic influence inside and outside the sensor
- Missing or poor coil wire and cable connection

Certificate

The test certificate generated by a PC contains:

- Test result with passed or failed
- Installation specification
- Flowmeter specification and configuration
- Vericator specification with date of calibration ensuring traceability to international standards.

MAGFLO® Verification Certificate									
Customer:					MAGFLO® Identification:				
Name _____					TAG No./Name 0				
Address _____					Sensor Code No. 7ME634				
Phone _____					Sensor Serial No. 057701H142				
Email _____					Transmitter Code No. 7ME692				
					Transmitter Serial No. 109418N080				
					Location _____				
Results:									
Verification file name or No. FT-103FT2801									
Transmitter Passed									
Sensor Insulation Passed									
Magnetic Circuit Passed									
Velocity		Current Output			Frequency Output				
Theoretical	Theoretical	Actual	Deviation		Theoretical	Actual	Deviation		
0.5m/s	4.800mA	4.802mA	0.25%		0.500kHz	0.501kHz	0.11%		
1.0m/s	5.600mA	5.601mA	0.08%		1.000kHz	1.001kHz	0.07%		
3.0m/s	8.800mA	8.804mA	0.08%		3.000kHz	3.004kHz	0.14%		
Current Output 4-20mA					Frequency Output 0-10kHz				
Transmitter Settings:					Sensor Details:				
Basic Qmax. 2.00000 m³/h					Size DN 15 1/2 IN				
Flow Direction Positive					Cal. Factor 0.16531426				
Low flow Cut-off 1.50%					Correction Factor 1.0				
Empty Pipe ON					Excitation Freq. 12.5Hz				
Output Current Output ON (4-20mA)									
Time Constant 5.0 Sec.									
Relay Output Error Level									
Digital Output Pulse									
Frequency Range N/A									
Time Constant N/A									
Volume/pulse 1.0 l/p									
Pulse width 0.51999998 sec.									
Pulse polarity Positive									
Totalizer 1 value before test 819442.93213 l					Vericator Details (083F5060)				
Totalizer 1 value after test 819458.92334 l					Serial No. 107920N490				
Totalizer 2 value before test 693.87579 l					Device No. 94683				
Totalizer 2 value after test 693.88145 l					Software Version 1.40				
Operating time in days 1068					PC-Software Version 5.01				
					Cal. date 2015.10.26				
					ReCal. date 2016.10.26				
Comments									
These tests verify that the flowmeter is functioning within 2% deviation of the original test parameters.									
Verification is traceable to National and International Standards.									
Date and signature _____									
2016.10.26									

Description

SITRANS F M Vericator

- 11 ... 30 V DC, 11 ... 24 V AC, 115 ... 230 V, 50 Hz
- 11 ... 30 V DC, 11 ... 24 V AC, 115 ... 230 V, 60 Hz

Article No.

FDK:083F5060

FDK:083F5061

Note:

It is mandatory to have the Vericator returned to the factory once a year for check and re-verification.



Overview



Transmitter MAG 5000/6000 compact version (left) and 19" insert version (right)

The MAG 5000 and 6000 are transmitters engineered for high performance, easy installation, commissioning and maintenance. The transmitters evaluate the signals from the SITRANS F M sensors type MAG 1100, MAG 1100 F, MAG 3100, MAG 3100 P and MAG 5100 W.

Transmitter types:

- MAG 5000: Max. measuring error $\pm 0.4 \% \pm 1 \text{ mm/s}$ (incl. sensor)
- MAG 6000: Max. measuring error $\pm 0.2 \% \pm 1 \text{ mm/s}$ (incl. sensor, see also sensor specifications) and with additional features such as: "plug & play" add-on bus modules; integrated batch functions.

Benefits

- Superior signal resolution for optimum turn down ratio
- Digital signal processing with many possibilities
- Automatic reading of SENSORPROM data for easy commissioning
- User configurable operation menu with password protection.
- 3 lines, 20 characters display in 11 languages.
- Flow rate in various units
- Totalizer for forward, reverse and net flow as well as additional information available
- Multiple functional outputs for process control, minimum configuration with analogue, pulse/frequency and relay output (status, flow direction, limits)
- Comprehensive self-diagnostic for error indication and error logging (see under SITRANS F M diagnostics)
- Batch control (MAG 6000 only)
- Custody transfer approval: PTB, OIML R 117, OIML R 49, MI-001, PTB K 7.2 and OE12/C 040 for chilled water
- MAG 6000 with add-on bus modules for HART, FOUNDATION Fieldbus H1, DeviceNet, Modbus RTU/RS 485, PROFIBUS PA and DP

Application

The SITRANS F M flowmeters are suitable for measuring the flow of almost all electrically conductive liquids, pastes and slurries. The main applications can be found in:

- Water and waste water
- Chemical and pharmaceutical industries
- Food and beverage industries
- Power generation and utility

Design

The transmitter is designed as either IP67 NEMA 4X/6 enclosure for compact or wall mounting or 19" version as a 19" insert as a base to be used in:

- 19" rack systems
- Front panel mounting IP65/NEMA 2
- Panel mounting IP20/NEMA 1
- Wall mounting IP66/NEMA 4X

Several options on 19" versions are available such as:

- Transmitters mounted in safe area for Ex ATEX approved flow sensors (incl. barriers)
- Transmitters with electrode cleaning unit on request

Function


The MAG 5000/6000 are transmitters with a built-in alphanumeric display in several languages. The transmitters evaluate the signals from the associated electromagnetic sensors and also fulfil the task of a power supply unit which provides the magnet coils with a constant current.

Further information on connection, mode of operation and installation can be found in the data sheets for the sensors.


Displays and controls

Operation of the transmitter can be carried out using:

- Control and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS or Modbus communication

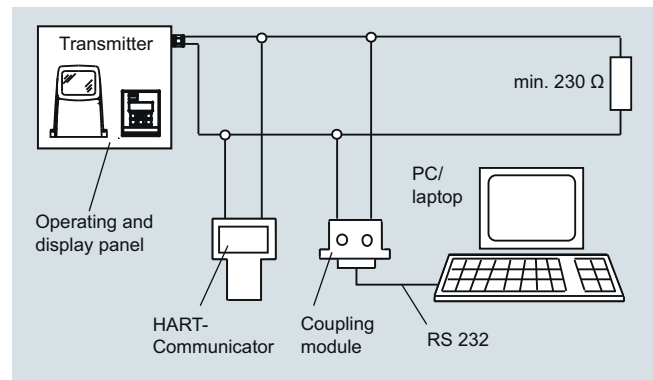

HART communication

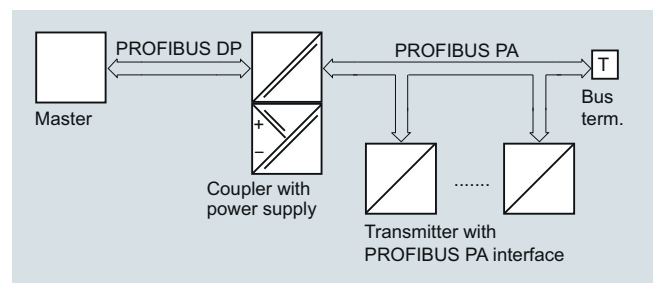

PROFIBUS PA communication

Flow Measurement

SITRANS F M

Transmitter MAG 5000/6000

Technical specifications

Mode of operation and design	
Measuring principle	Electromagnetic with pulsed constant field
Empty pipe	Detection of empty pipe (special cable required in remote mounted installation)
Excitation frequency	Depend on sensor size
Electrode input impedance	$> 1 \times 10^{14} \Omega$
Input	
Digital input	11 ... 30 V DC, $R_i = 4.4 \text{ K}\Omega$
• Activation time	50 ms
• Current	$I_{11 \text{ V DC}} = 2.5 \text{ mA}$, $I_{30 \text{ V DC}} = 7 \text{ mA}$
Output	
Current output	
• Signal range	0 ... 20 mA or 4 ... 20 mA
• Load	$< 800 \Omega$
• Time constant	0.1 ... 30 s, adjustable
Digital output	
• Frequency	0 ... 10 kHz, 50 % duty cycle (uni/bidirectional)
• Pulse (active)	24 V DC, 30 mA, $1 \text{ K}\Omega \leq R_i \leq 10 \text{ K}\Omega$, short-circuit-protected (power supplied from flowmeter)
• Pulse (passive)	3 ... 30 V DC, max. 110 mA, $200 \Omega \leq R_i \leq 10 \text{ K}\Omega$ (powered from connected equipment)
• Time constant	0.1 ... 30 s, adjustable
Relay output	
• Time constant	Changeover relay, same as current output
• Load	42 V AC/2 A, 24 V DC/1 A
Low flow cut off	0 ... 9.9 % of maximum flow
Galvanic isolation	All inputs and outputs are galvanically isolated.
Max. measuring error (incl. sensor and zero point)¹⁾	
• MAG 5000	0.4 % $\pm 1 \text{ mm/s}$
• MAG 6000	0.2 % $\pm 1 \text{ mm/s}$
Rated operation conditions	
Ambient temperature	
• Operation	- Display version: -20 ... +60 °C (-4 ... +140 °F) - Blind version: -20 ... +60 °C (-4 ... +140 °F) - MI-001 version: -25 ... +55 °C (-13 ... +131 °F) - Custody transfer (CT) version: -20 ... +50 °C (-4 ... +122 °F)
• Storage	-40 ... +70 °C (-40 ... +158 °F)
Mechanical load (vibration)	
Compact version	18 ... 1000 Hz, 3.17 g RMS, sinusoidal in all directions to IEC 60068-2-36
19" insert	1 ... 800 Hz, 1 g, sinusoidal in all directions to IEC 60068-2-36
Degree of protection	
Compact version	IP67/NEMA 4X/6 to IEC 529 and DIN 40050 (1 mH ₂ O 30 min.)
19" insert	IP20/NEMA 1 to IEC 529 and DIN 40050
EMC performance	
	IEC/EN 61326-1 (all environments) IEC/EN 61326-2-5

Display and keypad	
Totalizer	Two eight-digit counters for forward, net or reverse flow
Display	
	Background illumination with alphanumeric text, 3 x 20 characters to indicate flow rate, totalized values, settings and faults; Reverse flow indicated by negative sign
Time constant	Time constant as current output time constant
Design	
Enclosure material	Fiber glass reinforced polyamide; stainless steel AISI 316/1.4436 (IP65)
• Compact version	Standard 19" insert of aluminum/steel (DIN 41494), width: 21 TE, height: 3 HE
• 19" insert	IP20/NEMA 1; Aluminum
• Back of panel	IP20/NEMA 1 (prepared for IP65/NEMA 2 display side); ABS plastic
• Panel mounting	IP66/NEMA 4X; ABS plastic
• Wall mounting	
Dimensions	
Compact version	See dimensional drawings
19" insert	See dimensional drawings
Weight	
Compact version	0.75 kg (2 lb)
19" insert	See dimensional drawings
Power supply	
	115 ... 230 V AC +10 % -15 %, 50 ... 60 Hz 11 ... 30 V DC or 11 ... 24 V AC
Power consumption	
	230 V AC: 17 VA 24 V AC: 9 VA, $I_N = 380 \text{ mA}$, $I_{ST} = 8 \text{ A}$ (30 ms) 12 V DC: 11 W, $I_N = 920 \text{ mA}$, $I_{ST} = 4 \text{ A}$ (250 ms) 24 V DC: 8.4 VA, $I_N = 350 \text{ mA}$, $I_{ST} = 4 \text{ A}$ (10 ms)
	$I_{ST} = 4 \text{ A}$ (250 ms): For solar panel please secure stable current supply
Certificates and approvals	
General purpose	- CE (LVD, EMC, PED, RoHS) - UL (c-UL-us)
Hazardous areas	- FM, CSA - NI Class I Div. 2 Groups A, B, C, D
Custody transfer	- Cold water: MI-001 - Chilled water - PTB K 7.2 (Germany) - OE12/C 040 (Austria) - TS 27.02 008 (Denmark)
Marine	- ABS - Bureau Veritas - DNV - GL - Lloyd' s Register of Shipping
(only for remote version with MAG 5100 W, DN 50 ... DN 300)	- CMC/CPA (China) - C-TICK (Australia and New Zealand EMC) - EAC (Russia, Belarus, Kazakhstan) - KCC (South Korea)
Others	



Communication

Standard

- MAG 5000

- MAG 6000

Optional (MAG 6000 only)

- MAG 5000/6000 CT

Without serial communication or HART as option
Prepared for client-mounted add-on modules
HART, Modbus RTU/RS 485, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS PA, PROFIBUS DP as add-on modules
No communication modules approved

¹⁾ For detailed accuracy specifications, see page 3/20

Safety barrier (e/ia)

Application	For use with MAG 5000/6000 19" and MAG 1100 Ex/MAG 3100 Ex		
Ex approval	MAG 1100 Ex [EEx e ia] IIB ATEX, EAC Ex MAG 3100 Ex [EEx e ia] IIC ATEX, EAC Ex		
Cable parameter	Group	Capacity in μF	Inductance in mH
Electrode	IIC	≤ 4.1	≤ 80
	IIB	≤ 45	≤ 87
	IIA	≤ 45	≤ 87
Ambient temperature			
• During operation	-20 ... +50 °C (-4 ... +122 °F)		
• During storage	-20 ... +70 °C (-4 ... +158 °F)		
Enclosure			
• Material	Standard 19" insert in aluminum/steel (DIN 41494)		
• Width	21 TE (4.75")		
• Height	3 HE (5.25")		
• Rating	IP20 / NEMA 1 to EN 60529		
• Mechanical load	1 g, 1 ... 800 Hz sinusoidal in all directions to EN 60068-2-36		



Flow Measurement

SITRANS F M

Transmitter MAG 5000/6000

Selection and Ordering data

Transmitter MAG 5000

Description	Article No.	
Transmitter MAG 5000 Blind for compact and wall mounting; IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6910-1AA30-0AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6910-1AA10-0AA0	
Transmitter MAG 5000 Display for compact and wall mounting; IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6910-1AA30-1AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6910-1AA10-1AA0	
• 115 ... 230 V AC, 50/60 Hz, with HART	7ME6910-1AA10-1BA0	
Transmitter MAG 5000 CT for compact and wall mounting, approved for custody transfer, without verification (no approval marks - only a complete flowmeter can be verified, i.e. sensor together with the transmitter); IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6910-1AA30-1AD0	
• 115 ... 230 V AC, 50/60 Hz	7ME6910-1AA10-1AD0	
Transmitter MAG 5000 for 19" rack and wall mounting		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6910-2CA30-1AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6910-2CA10-1AA0	

Transmitter MAG 6000

Description	Article No.	
Transmitter MAG 6000 Blind for compact and wall mounting; IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6920-1AA30-0AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6920-1AA10-0AA0	
Transmitter MAG 6000 for compact and wall mounting; IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6920-1AA30-1AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6920-1AA10-1AA0	
Transmitter MAG 6000 for compact and wall mounting; IP65/NEMA 4, stainless steel AISI 316/1.4436 (only for sensor with stainless steel terminal box) (for remote version order stainless steel terminal box separately)		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6920-1QA30-1AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6920-1QA10-1AA0	
Transmitter MAG 6000 CT for compact and wall mounting, approved for custody transfer, without verification (no approval marks - only a complete flowmeter can be verified, i.e. sensor together with the transmitter); IP67/NEMA 4X/6, fibre glass reinforced polyamide		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6920-1AA30-1AD0	
• 115 ... 230 V AC, 50/60 Hz	7ME6920-1AA10-1AD0	
<u>Spare part transmitter for CT systems produced before 12/2016 or with firmware version 3.03</u>		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6920-1AA30-1AB0	
• 115 ... 230 V AC, 50/60 Hz	7ME6920-1AA10-1AB0	
Transmitter MAG 6000 SV for compact and wall mounting; special excitation frequency 44 Hz for Batch application DN ≤ 25/1" IP67/NEMA 4X/6, fibre glass reinforced polyamide		
11 ... 30 V DC/ 11 ... 24 V AC	7ME6920-1AB30-1AA0	
115 ... 230 V AC, 50/60 Hz	7ME6920-1AB10-1AA0	



Description	Article No.	
Transmitter MAG 6000 for 19" rack and wall mounting		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6920-2CA30-1AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6920-2CA10-1AA0	
Transmitter MAG 6000 SV for 19" rack and wall mounting; special excitation frequency 44 Hz for Batch application DN ≤ 25/1"		
• 11 ... 30 V DC/ 11 ... 24 V AC	7ME6920-2CB30-1AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6920-2CB10-1AA0	
MAG 6000 19" insert, complete mounted with IP66/ NEMA 4X wall mounting enclosure in ABS plastic; 115 ... 230 V AC, 50/60 Hz; cable gland PG13.5	7ME6920-2EA10-1AA0	
MAG 6000 19" insert with safety barrier for Ex-approved sensors, complete mounted with IP66/NEMA 4X wall mounting enclosure in ABS plastic; 115 ... 230 V AC, 50/60 Hz; cable gland PG13.5		
• For ATEX 2G D sensors	7ME6920-2MA11-1AA0	
MAG 6000 SV 19" insert, complete mounted with IP66/NEMA 4X wall mounting enclosure in ABS plastic; special excitation frequency 44 Hz for Batch application DN ≤ 25/1"; cable gland PG13.5		
• 11 ... 30 V DC, 11 ... 24 V AC	7ME6920-2EB30-1AA0	
• 115 ... 230 V AC, 50/60 Hz	7ME6920-2EB10-1AA0	

Operating instructions for SITRANS F M MAG 5000/6000

Description	Article No.
For SITRANS F M MAG 5000/6000 IP67	
• English	A5E02338368
• German	A5E02944982
For SITRANS F M MAG 5000/6000 19"	
• English	A5E02082880

All literature is available to download for free, in a range of languages, at www.siemens.com/processinstrumentation/documentation

Communication modules for MAG 6000


Description	Article No.	
HART (not for MAG 6000 I)	FDK:085U0226	
Modbus RTU/RS 485	FDK:085U0234	
PROFIBUS PA Profile 3	FDK:085U0236	
PROFIBUS DP Profile 3	FDK:085U0237	
DeviceNet	FDK:085U0229	
FOUNDATION Fieldbus H1	A5E02054250	

Operating instructions for SITRANS F add-on modules

Description	Article No.
HART	
• English	A5E03089708
PROFIBUS PA/DP	
• English	A5E00726137
• German	A5E01026429
Modbus	
• English	A5E00753974
• German	A5E03089262
FOUNDATION Fieldbus	
• English	A5E02318728
• German	A5E02488856
DeviceNet	
• English	A5E03089720

All literature is available to download for free, in a range of languages, at www.siemens.com/processinstrumentation/documentation

Accessories for MAG 5000 and MAG 6000


Description	Article No.	
Accessory kit for remote use of sensor with two 5-pin terminal blocks	A5E34827189	
Wall mounting unit for MAG 5000/6000 IP67/NEMA 4X/6, terminal box in polyamide ¹⁾		
• 4 x M20 cable glands	FDK:085U1018	
• 4 x 1/2" NPT cable glands	FDK:085U1053	
Special wall mounting unit for MAG 5000/6000 IP67/ NEMA 4X/6, mounting bracket in stainless steel AISI 316 (1.4401), terminal box in polyamide		
• 4 x M20 cable glands	A5E36699702	
• 4 x 1/2" NPT cable glands	A5E36699938	
Sun lid for MAG 5000/6000 transmitter (Frame and lid)	A5E02328485	
Standard coil or electrode cable, 3 x 1.5 mm ² / 18 gage, single shielded with PVC jacket, Temp. range: -30 ... +70 °C (-22 ... +158 °F)		
• 5 m (16.5 ft)	A5E02296523	
• 10 m (33 ft)	FDK:083F0121	
• 20 m (65 ft)	FDK:083F0210	
• 30 m (98 ft)	A5E02297309	
• 40 m (131 ft)	FDK:083F0211	
• 50 m (164 ft)	A5E02297317	
• 60 m (197 ft)	FDK:083F0212	
• 100 m (328 ft)	FDK:083F0213	
• 150 m (492 ft)	FDK:083F3052	
• 200 m (656 ft)	FDK:083F3053	
• 500 m (1640 ft)	FDK:083F3054	

¹⁾ For stainless steel wall mounting kit, order:
- M20: FDK:085U1018 and A5E00836867
- 1/2" NPT: FDK:085U1053 and A5E00836868

Flow Measurement

SITRANS F M

Transmitter MAG 5000/6000


Description	Article No.	
Special electrode cable ¹⁾ (empty pipe detection or low conductivity), 3 x 0.25 mm ² , double shielded with PVC jacket; Temperature range : -30 ... +70 °C (-22 ... +158 °F)		
• 10 m (33 ft)	FDK:083F3020	
• 20 m (65 ft)	FDK:083F3095	
• 40 m (131 ft)	FDK:083F3094	
• 60 m (197 ft)	FDK:083F3093	
• 100 m (328 ft)	FDK:083F3092	
• 150 m (492 ft)	FDK:083F3056	
• 200 m (656 ft)	FDK:083F3057	
• 500 m (1640 ft)	FDK:083F3058	
Low-noise electrode coax cable for low conductivity and high vibration levels, 3 x 0.13 mm ² ; Temp. range: -25 ... +85 °C (-13 ... +185 °F)		
• 2 m (6.6 ft)	A5E02272692	
• 5 m (16.5 ft)	A5E02272723	
• 10 m (33 ft)	A5E02272730	
Cable kit including standard coil cable (3 x 1.5 mm ² / 18 gage, single shielded with PVC jacket) and special electrode cable ¹⁾ (3 x 0.25 mm ² , double shielded with PVC jacket); Temperature range: -30 ... +70 °C (-22 ... +158 °F)		
• 5 m (16.5 ft)	A5E02296329	
• 10 m (33 ft)	A5E01181647	
• 15 m (49 ft)	A5E02296464	
• 20 m (65 ft)	A5E01181656	
• 25 m (82 ft)	A5E02296490	
• 30 m (98 ft)	A5E02296494	
• 40 m (131 ft)	A5E01181686	
• 50 m (164 ft)	A5E02296498	
• 60 m (197 ft)	A5E01181689	
• 100 m (328 ft)	A5E01181691	
• 150 m (492 ft)	A5E01181699	
• 200 m (656 ft)	A5E01181703	
• 500 m (1640 ft)	A5E01181705	
Potting kit for IP68/NEMA 6P sealing of sensor junction box	FDK:085U0220	
19" safety barrier (21 TE) ¹⁾ [Ex e ia] IIC for MAG 1100 Ex sensors and MAG 3100 Ex sensors 12 ... 24 V, 115 ... 230 V, incl. back plate (A5E02559810)	FDK:083F5034	
Front panel mounting enclosure IP65/NEMA 2 in ABS plastic for 19" insert (21 TE)	FDK:083F5030	
Front panel mounting enclosure IP65/NEMA 2 in ABS plastic for 19" insert (42 TE)	FDK:083F5031	

Description	Article No.	
Panel mounting enclosure IP20/NEMA 1 in aluminium for 19" insert (21 TE)	FDK:083F5032	
Panel mounting enclosure IP20/NEMA 1 in aluminium for 19" insert (42 TE)	FDK:083F5033	
Wall mounting enclosure IP66/NEMA 4X in ABS plastic for 19" insert (cable glands and connection board not included)		
• 21 TE	FDK:083F5037	
• 42 TE	FDK:083F5038	
Front cover (7TE) for panel mounting enclosure	FDK:083F4525	
Sun shield for MAG 5000/6000 transmitters in remote design	A5E01209496	
Sun Shield for MAG 5000/6000 transmitter in compact design on MAG 3100 (DN 15 ... 2000/1/2" ... 78") or MAG 5100 W (DN 150 ... 1200/6" ... 48")	A5E01209500	

¹⁾ Special cables cannot be used with 19" safety barrier



Spare parts

Description	Article No.	
Connection board (for polyamide terminalbox)		
• 12 ... 24 V	A5E02559817	
• 115 ... 230 V	A5E02559816	
Connection board (for stainless steel terminalbox)		
• 12 ... 24 V	A5E02604280	
• 115 ... 230 V	A5E02604272	
Connection board MAG 5000/6000 19" insert for panel mounting enclosure, 12 ... 24 V/115 ... 230 V	A5E02559809	
Connection board MAG 5000/6000 19" insert with safety barrier for panel mount- ing enclosure, 12 ... 24 V/115 ... 230 V	A5E02559810	
Connection board MAG 5000/6000 19" insert with safety barrier for panel mount- ing enclosure, 12 ... 24 V/115 ... 230 V (only for sensors produced before October 2007)	A5E02559811	
Connection board MAG 5000/6000 19" insert with cleaning unit for panel mount- ing enclosure, 12 ... 24 V/115 ... 230 V	FDK:083F4123	
SENSORPROM memory unit (Sensor code and serial num- bers must be specified on order)		
• 2 kB (for MAG 5000/6000/ MAG 6000 I)		
- 1 pc.	FDK:085U1005	
- 10 pcs.	FDK:083F5052	
• 250 B (for MAG 2500/3000)	FDK:085U1008	
Display unit for MAG 5000/6000		
• Black neutral front	FDK:085U1038	
• Siemens front	FDK:085U1039	
HW key	On request	
Cable glands (polyamide), 4 pcs.		
• M20	A5E00822490	
• 1/2" NPT	A5E00822501	
• PG 13.5, 2 pcs.	FDK:083G0228	

Description	Article No.	
Sealing screws for sensor/ transmitter, 2 pcs	FDK:085U0221	
Terminal box, in polyamide, inclusive lid, terminal blocks, gasket and screws		
• M20	FDK:085U1050	
• 1/2" NPT	FDK:085U1052	
Terminal box lid, in polyamide	FDK:085U1003	
Terminal box, in stainless steel, inclusive lid, terminal blocks, gasket and screws, for MAG 6000 in stainless steel and for all Ex sensors,		
• M20	A5E00836867	
• 1/2" NPT	A5E00836868	
Terminal box (3A) for MAG 1100 F in polyamide, inclusive lid, terminal blocks, gasket and screws		
• M20	A5E00822478	
• 1/2" NPT	A5E00822479	
Gasket for terminal box lid in polyamide or for MAG 5000/ 6000 IP67/ NEMA 4X/6 enclo- sure in polyamide (5 pcs.)	A5E37086797	
Spare part kit for remote use of sensor with 20 pcs. 5-pin ter- minal blocks	A5E34346873	
Display frame in polyamide for MAG 5000/6000 IP67/ NEMA 4X/6 (5 pcs.)	A5E43491675	
Connection board MAG 5000/6000 19" insert for wall mounting enclosure, 12 ... 24 V / 115 ... 230 V	A5E02559813	
Connection board MAG 5000/ 6000 19" insert with safety bar- rier for wall mounting enclosure, 12 ... 24 V/115 ... 230 V	A5E02559814	
Connection board MAG 5000/ 6000 19" insert with safety bar- rier for wall mounting enclo- sure, 12 ... 24 V/115 ... 230 V (only for sensors produced before October 2007)	A5E02559812	
Connection board MAG 5000/ 6000 19" insert with cleaning unit for wall mounting enclo- sure, 12 ... 24 V/115 ... 230 V	A5E02559815	
SENSORPROM programmer with RS 232 interface	FDK:083H4246	


Flow Measurement

SITRANS F M


Transmitter MAG 5000/6000

Dimensional drawings

Transmitter IP67/NEMA 4X/6 compact polyamide

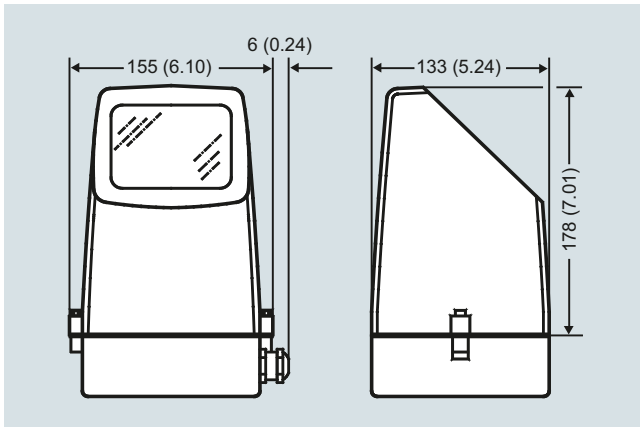


Transmitter compact mounted, dimensions in mm (inch)

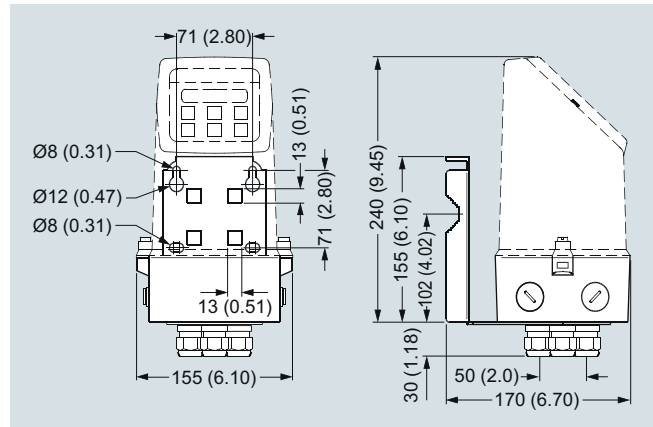


Transmitter wall mounted, dimensions in mm (inch)

Transmitter, 19" IP20/NEMA 1 standard unit

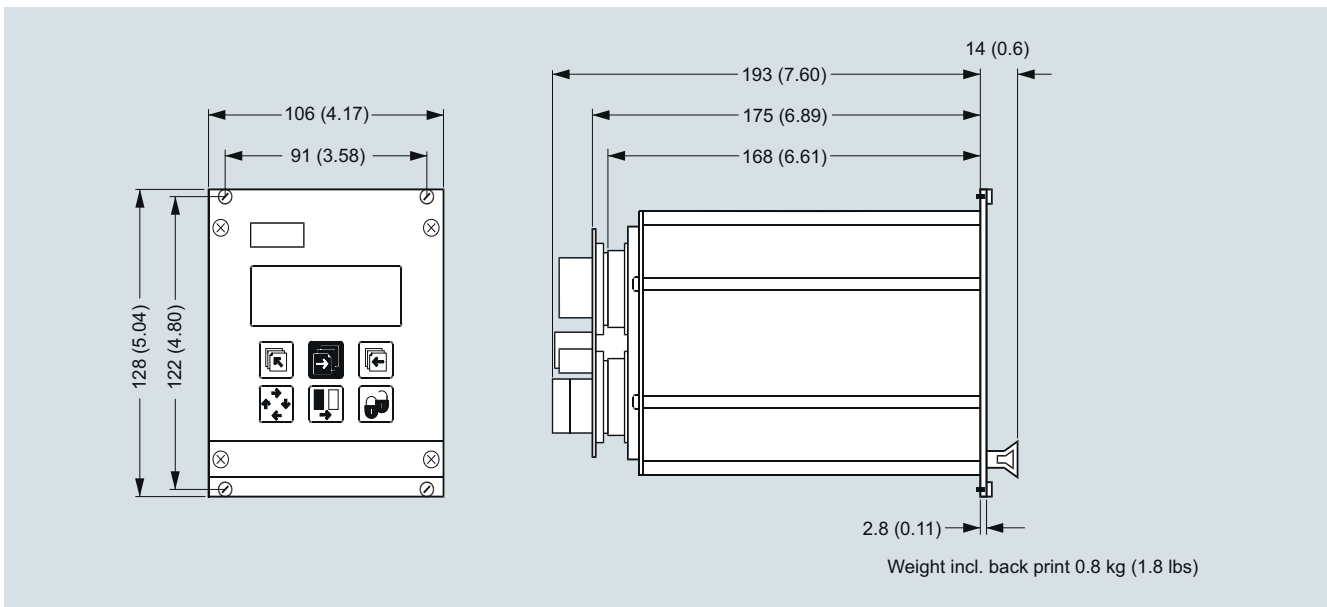


Dimensions in mm (inch)

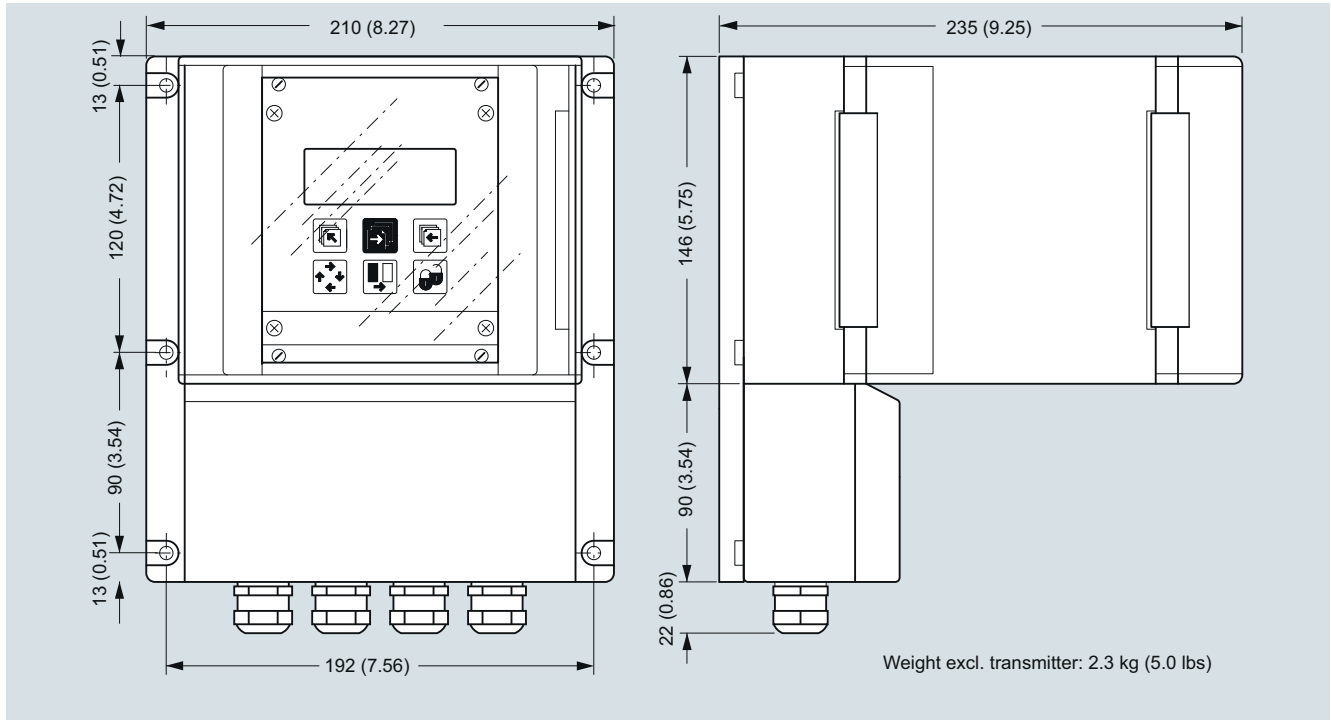

Transmitter, wall mounting IP66/NEMA 4X, 21 TE


Dimensions in mm (inch)

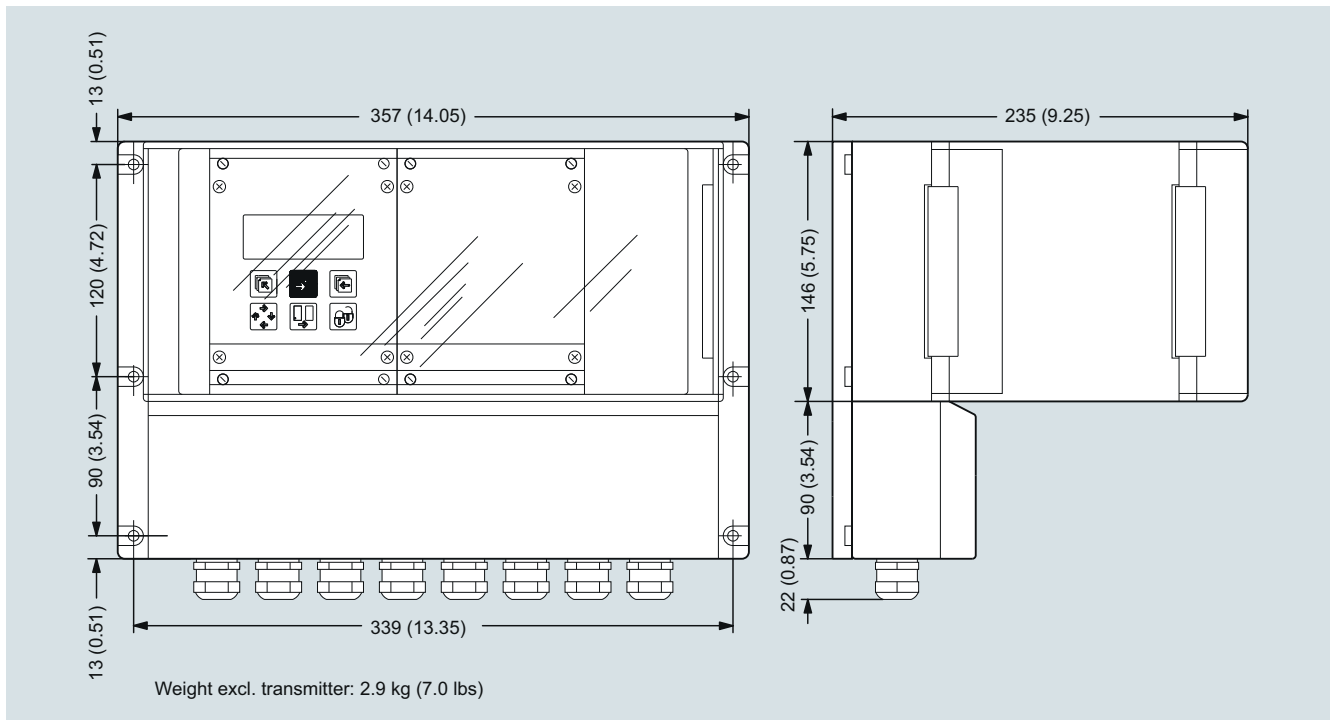Transmitter, wall mounting IP66/NEMA 4X, 42 TE


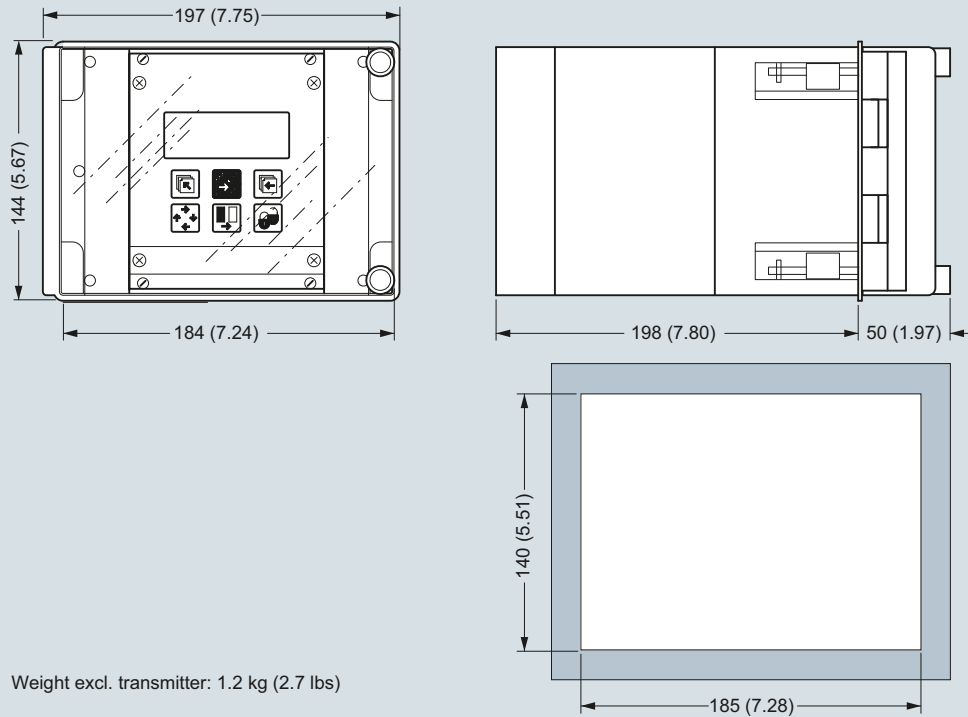
Dimensions in mm (inch)

Flow Measurement

SITRANS F M


Transmitter MAG 5000/6000

Transmitter, panel front IP20/NEMA 1, 21 TE




Dimensions in mm (inch)

Transmitter, panel front IP20/NEMA 1, 42 TE

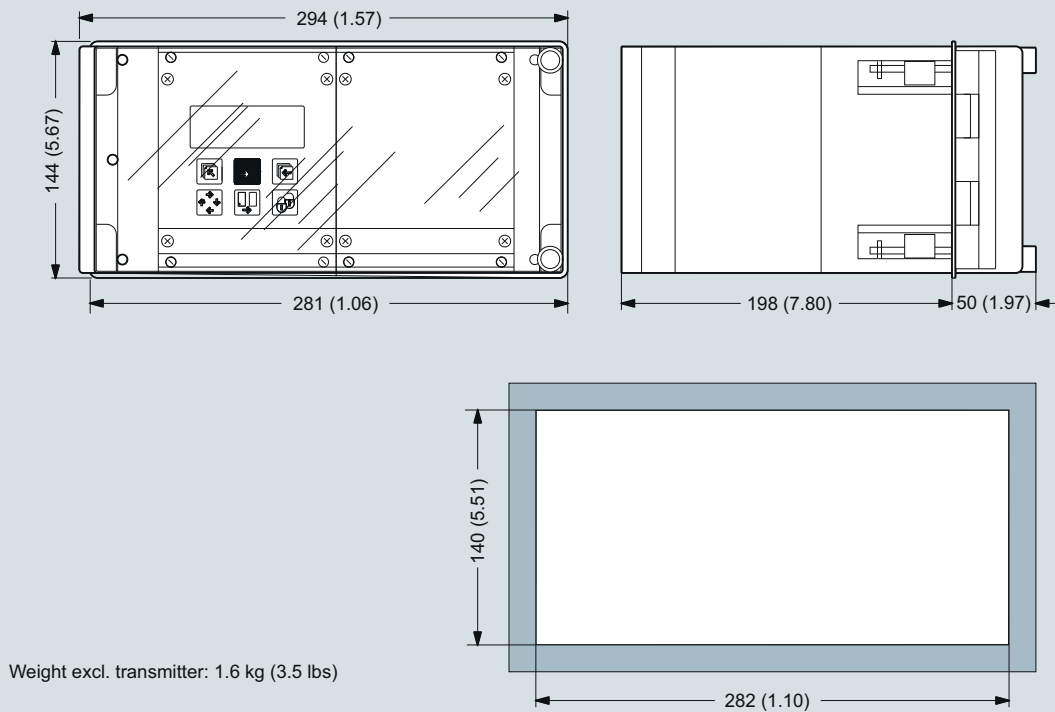


Dimensions in mm (inch)

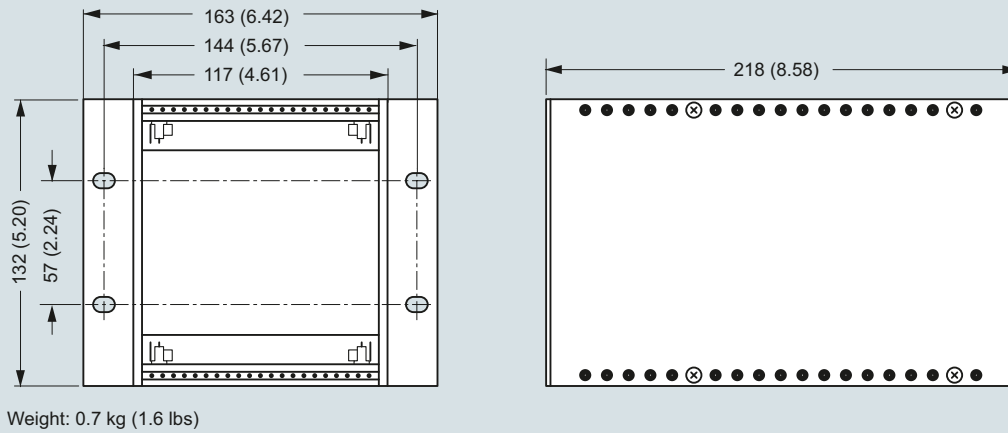

Transmitter, back of panel IP20/NEMA 1, 21 TE


Dimensions in mm (inch)

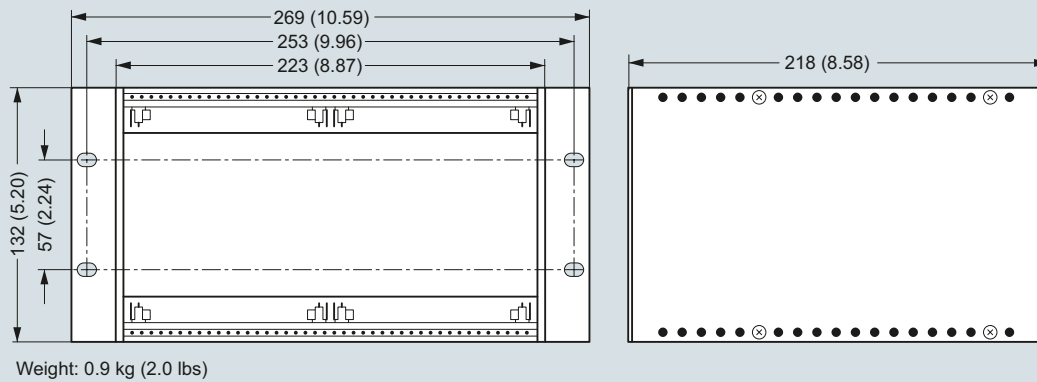Transmitter, back of panel IP20/NEMA 1, 42 TE


Dimensions in mm (inch)

Flow Measurement

SITRANS F M

Transmitter MAG 5000/6000

Schematics

Electrical connection

Grounding

PE must be connected due to safety class 1 power supply.

Mechanical counters


When mounting a mechanical counter to terminals 57 and 58 (active output), a 1000 μ F capacitor must be connected to the terminals 56 and 58. Capacitor + is connected to terminal 56 and capacitor - to terminal 58.

Output cables


If the output cable length is long in noisy environment, we recommend to use shielded cable.

Power supply


Transmitter





Outputs

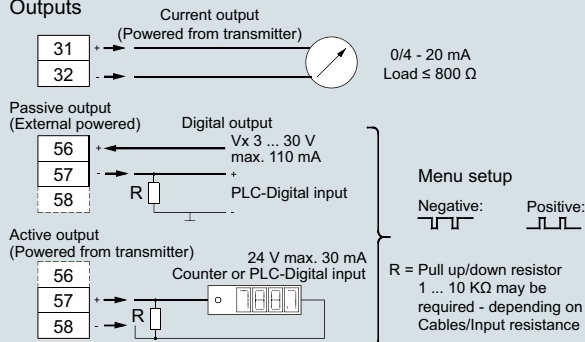


Relay output



Digital input



Sensor connection

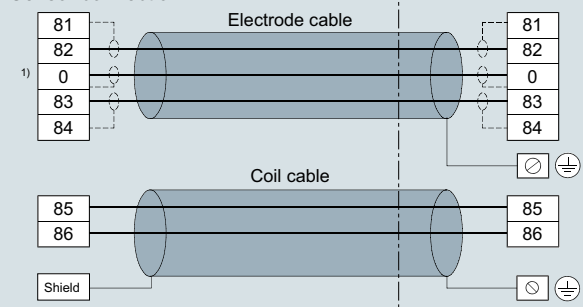

1) Note:
Special cable with individual wire shields (shown as dotted lines) are only required when using empty pipe function or long cables.



Flow Measurement

SITRANS F M

Flow sensor MAG 5100 W

Overview



The SITRANS F M MAG 5100 W is an electromagnetic flow sensor designed to meet ground water, drinking water, waste water, sewage or sludge applications.

Benefits

- DN 15 to DN 1200/2000 (½" to 48"/78")
- Stock program of MAG 5100 W secures short delivery time
- Connection flanges EN 1092-1 (DIN 2501), ANSI, AWWA, AS and JIS.
- NBR Hard Rubber and Ebonite Hard Rubber liner for all water applications
- EPDM liner with drinking water approvals
- Hastelloy integrated grounding and measuring electrodes
- Increased low flow accuracy for water leak detection, due to coned liner design.
- Drinking water approvals
- Suitable for direct burial and constant flooding
- Custody transfer approvals
- Built-in length according to ISO 13359; the standard includes sizes up to DN 400.
- Easy commissioning, SENSORPROM unit automatically uploads calibration values and settings.
- Designed so patented in-situ verification can be conducted. Using SENSORPROM fingerprint.
- Custody transfer option for water billing, with type approval after OIML R 49 and verified according to MI-001 - OD inlet/OD outlet installation
 - Pattern approval OIML R 49
 - Conform to ISO 4064 and EN 14154 for mechanical flowmeters
 - PTB K7.2
 - Kiwa water approval
- FM Fire Service Meter (Class Number 1044) for automatic fire protection systems
- Meets EEC directives: PED 2014/68/EU pressure directive for EN1092-1 flanges
- Simple onsite or factory upgrade to IP68/NEMA 6P of a standard sensor
- Type approval of marine equipment (ABS, Bureau Veritas, DNV, GL, Lloyd's Register)

Application

The main applications of the SITRANS F M electromagnetic flow sensors can be found in the following fields:

- Water abstraction
- Water treatment
- Water distribution network (leak detection management)
- Custody transfer water meters
- Irrigation
- Waste water treatment
- Filtration plant (e.g. reverse osmosis and ultra filtration)
- Industrial water applications

Mode of operation

The flow measuring principle is based on Faradays law of electromagnetic induction according to which the sensor converts the flow into an electrical voltage proportional to the velocity of the flow.

Integration

The complete flowmeter consists of a flow sensor and an associated transmitter SITRANS F M MAG 5000, MAG 6000 or MAG 6000 I.

The flexible communication concept USM II simplifies integration and update to a variety of fieldbus systems, e.g. HART, DeviceNet, PROFIBUS DP and PA, FOUNDATION Fieldbus H1 or Modbus RTU/RS 485.



Technical specifications

Product characteristic	MAG 5100 W (7ME6520) Mainly for the European market EPDM or NBR lining	MAG 5100 W (7ME6580) Mainly for the non-European market Ebonite lining
Design and nominal size	Coned sensor (octagon liner): DN 15 ... 40 (½" ... 1½") Coned sensor: DN 50 ... 300 (2" ... 12") Full bore sensor: DN 350 ... 1200 (14" ... 48")	Full bore sensor: DN 25 ... 2000 (1" ... 78")
Measuring principle	Electromagnetic induction	Electromagnetic induction
Excitation frequency (Mains supply: 50/60 Hz)	DN 15 ... 65 (½" ... 2½"): 12.5 Hz/15 Hz DN 80 ... 150 (3" ... 6"): 6.25 Hz/7.5 Hz DN 200 ... 300 (8" ... 12"): 3.125 Hz/3.75 Hz DN 350 ... 1200 (14" ... 48"): 1.5625 Hz/1.875 Hz	DN 25 ... 65 (1" ... 2½"): 12.5 Hz/15 Hz DN 80 ... 150 (3" ... 6"): 6.25 Hz/7.5 Hz DN 200 ... 1200 (8" ... 48"): 3.125 Hz/3.75 Hz DN 1400 ... 2000 (54" ... 78"): 1.5625 Hz/1.875 Hz
Process connection		
Flanges ¹⁾		
• EN 1092-1	PN 10 (145 psi): DN 200 ... 300 (8" ... 12") Flat face PN 10 (145 psi): DN 350 ... 1200 (14" ... 48") Raised face ²⁾ PN 16 (232 psi): DN 50 ... 300 (2" ... 12") Flat face ³⁾ PN 16 (232 psi): DN 350 ... 1200 (14" ... 48") Raised face PN 40 (580 psi): DN 15 ... 40 (½" ... 1½") Flat face	Raised face ³⁾ (EN 1092-1, DIN 2501 and BS 4504 have the same mating dimensions) PN 6 (87 psi): DN 1400 ... 2000 (54" ... 78") PN 10 (145 psi): DN 200 ... 2000 (8" ... 78") PN 16 (232 psi): DN 65 ... 600 (2½" ... 24") PN 40 (580 psi): DN 25 ... 50 (1" ... 2")
• ANSI B16.5	Class 150: ½" ... 12" Flat face; 14" ... 24" Raised face	Class 150: 1" ... 24"; Raised face
• AWWA C-207	Class D: 28" ... 48", Flat face	Class D: 28" ... 78", Flat face
• AS4087	PN 16 (232 psi): DN 15 ... DN 300 (2" ... 12") Flat Face; DN 350 ... DN 1200 (14" ... 48") Raised face	PN 16 (232 psi): DN 50 ... DN 1200 (2" ... 48") Raised face
• JIS B 2220:2004	-	K10 (1" ... 24")
Rated Operation conditions		
Ambient temperature		
• Sensor	-40 ... +70 °C (-40 ... +158 °F)	-20 ... +70 °C (-4 ... +158 °F)
• Compact with transmitter MAG 5000/6000 ⁴⁾	-20 ... +60 °C (-4 ... +140 °F)	-20 ... +60 °C (-4 ... +140 °F)
Operating pressure (Abs) [abs. bar] (Maximum operating pressure depending on flange standard, decreases with increasing operating temperature)	DN 15 ... 40 (½" ... 1½"): 0.01 ... 40 bar (0.15 ... 580 psi) DN 50 ... 300 (2" ... 12"): 0.03 ... 20 bar (0.44 ... 290 psi) DN 350 ... 1200 (14" ... 48"): 0.01 ... 16 bar (0.15 ... 232 psi)	DN 25 ... 50 (1" ... 2"): 0.01 ... 40 bar (0.15 ... 580 psi) DN 65 ... 1200 (2½" ... 48"): 0.01 ... 16 bar (0.15 ... 232 psi) DN 1400 ... 2000 (54" ... 78"): 0.01 ... 10 bar (0.15 ... 145 psi)
Enclosure rating		
• Standard	IP67 to EN 60529/NEMA 4X/6 (1 mH ₂ O for 30 min)	IP67 to EN 60529/NEMA 4X/6 (1 mH ₂ O for 30 min)
• Option	IP68 to EN 60529/NEMA 6P (10 mH ₂ O continuously)	IP68 to EN 60529/NEMA 6P (10 mH ₂ O continuously)
Pressure drop	DN 15 and 25 (½" and 1"): Max. 20 mbar (0.29 psi) at 1 m/s (3 ft/s) DN 40 ... 300 (1½" ... 12"): Max 25 mbar (0.36 psi) at 3 m/s (10 ft/s) DN 350 ... 1200 (14" ... 48"): Insignificant	Insignificant
Test pressure	1.5 x PN (where applicable) FM Fire Service: 2 x PN	1.5 x PN (where applicable)
Mechanical load (vibration)	18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36 Sensor: 3.17 g RMS Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 g RMS Sensor with compact MAG 6000 I mounted transmitter: 1.14 g RMS	18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36 Sensor: 3.17 g RMS Sensor with compact MAG 5000/6000 mounted transmitter: 3.17 g RMS Sensor with compact MAG 6000 I mounted transmitter: 1.14 g RMS



Flow Measurement

SITRANS F M

Flow sensor MAG 5100 W

Product characteristic	Mainly for the European market (7ME6520) EPDM or NBR lining	Mainly for the non-European market (7ME6580) Ebonite lining
<u>Medium conditions</u>		
Temperature of medium		
• NBR	-10 ... +70 °C (14 ... 158 °F)	-
• EPDM	-10 ... +70 °C (14 ... 158 °F)	-
• EPDM/NBR (MI-001)	0.1 ... 30 °C (32 ... 76 °F)	-
• Ebonite	-	-10 ... +70 °C (14 ... 158 °F)
EMC	2014/30/EU	2014/30/EU
Design		
Material		
• Housing and flanges	Carbon steel ASTM A 105, with corrosion-resistant coating Corrosivity category C4, according to ISO 12944-2	Carbon steel ASTM A 105, with corrosion-resistant coating Corrosivity category C4, according to ISO 12944-2
• Electrode	Hastelloy C276	Hastelloy C276
• Grounding electrode	Hastelloy C276	Hastelloy C276
• Terminal box	Fibre glass reinforced polyamide	Fibre glass reinforced polyamide
Certificates and approvals		
Calibration		
• Standard production calibration	Zero-point, 2 x 25 % and 2 x 90 %	Zero-point, 2 x 25 % and 2 x 90 %
• Special calibration	5-point calibration: 20 %, 40 %, 60 %, 80 %, 100 % of factory Q _{max} 10-point calibration: ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q _{max} Matched-pair calibration: default, 5-point or 10-point	5-point calibration: 20 %, 40 %, 60 %, 80 %, 100 % of factory Q _{max} 10-point calibration: ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q _{max} Matched-pair calibration: default, 5-point or 10-point
Custody transfer	- MI-001 cold water (EU): DN 50 ... DN 1200 (2" ... 48") - Kiwa water approval (NL): DN 50 ... DN 1200 (2" ... 48") - Chilled water pattern approval PTB K 7.2 DN 50 ... DN 300 (Germany)⁵⁾	-
Drinking water	EPDM liner: - WRAS (WRc, BS690 cold water, GB) - NSF/ANSI Standard 61⁶⁾ (Cold water, US) - ACS listed (F) - DVGW W270 (D) - Belgaqua (B) - MCERTS (GB environmental)	- WRAS (WRc, BS690 cold water, GB) - NSF/ANSI Standard 61⁶⁾ (Cold water, US)
Marine ⁷⁾	- American Bureau of Shipping (ABS) - Bureau Veritas - Det Norske Veritas (DNV) - Germanischer Lloyd (GL) - Lloyd's Register of Shipping	
Hazardous areas ⁸⁾		
• Standard sensor with/without MAG 5000/6000/6000 I	- FM - NI Class I Div. 2 Groups A, B, C, D - NI Class I Zone 2 Groups IIC	- FM - NI Class I Div. 2 Groups A, B, C, D - NI Class I Zone 2 Groups IIC
Pressure equipment	- PED conforming: All EN1092-1 flanges and ANSI Class 150 (< DN 300 /<12") – 2014/68/EU⁹⁾ - CRN	- PED conforming: All EN1092-1 flanges (< DN 600 /<24") – 2014/68/EU⁹⁾ - CRN
Others	- EAC (Russia, Belarus, Kazakhstan) - KCC (South Korea) - FM Fire Service Approval acc. to class 1044⁸⁾ - VdS: Extinguishing systems DN 50 ... 300	- EAC (Russia, Belarus, Kazakhstan) - CMC/CPA (China)

¹⁾ DN 750, DN 1050 and DN 1100 (30", 42" and 44") not available with EN 1092-1 (PN 10 and PN 16) and AS4087 flanges

²⁾ Type 01 (SORF)

³⁾ DN ≤ 600 type 01 (SORF); DN > 600 type 11

⁴⁾ Compact with transmitter MAG 5000 CT/6000 CT -20 ... +50 °C (-4 ... +122 °F)

⁵⁾ For verification submit Product Variation Request

⁶⁾ Including Annex G

⁷⁾ In remote version with sensor size DN 50 ... DN 300 (2" ... 12")

⁸⁾ For sizes larger than 600 mm (24") in PN 16 PED conformity is available as a cost-added option. The basic unit will carry the LVD (Low Voltage Directive) and EMC approval. All products sold outside of EU and EFTA are excluded from the directive, also products sold into certain market sectors are excluded. These include:

a) Meters used in networks for the supply, distribution and discharge of water.

b) Meters used in pipelines for the conveyance of any fluid from offshore to onshore.

c) Meters used in the extraction of petroleum or gas, including Christmas tree and manifold equipment.

d) Any meter mounted on a ship or mobile offshore platform. For further information on the PED standard and requirements see page 10/15.

⁹⁾ Not for sensors with 300 µm coating.



**MAG 5100 W (7ME6520) with MAG 6000 CT
(Revenue program) MI-001**


MAG 5100 W CT program is type approved according to international water meter standard OIML R 49. Since the first November 2006 the MI-001 water meter directive is in force, which means that all water meters can be sold across the EU borders if the water meters contain a MI-001 label.

The MAG 5100 W MI-001 verified and labeled products are a Class II approval according to Directive 2014/32/EU of the European Parliament and Council of 26 February, 2014 on measuring instruments, Annex VI Thermal Energy Meters (MI-004) in the sizes from DN 50 to DN 1200 (Article No. 7ME6520).


The MID certification is obtained as a modul B + D module approval according to the above mentioned directive.

Module B : Type approval according to OIML R 49

Module D : Quality insurance approval of production

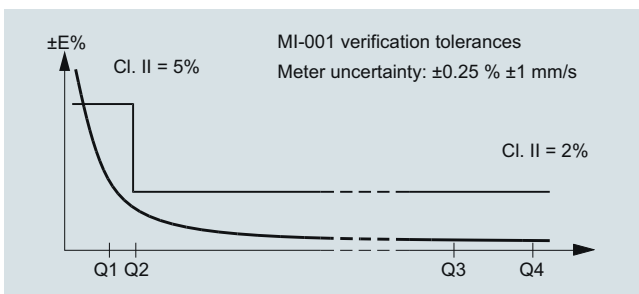**MAG 5100 W (7ME6520) with MAG 5000/MAG 6000 or
MAG 6000 CT for Fire Service applications**

MAG 5100 W (7ME6520) is FM Fire Service approved for automatic fire protection systems. The approval is applicable for the sizes DN 50, DN 80, DN 100, DN 150, DN 200, DN 250 and DN 300 (2", 3", 4", 6", 8", 10" and 12") with ANSI B16.5 Class 150 flanges. The FM Fire Service approved product can be ordered via the Z-options P20, P21 and P22.

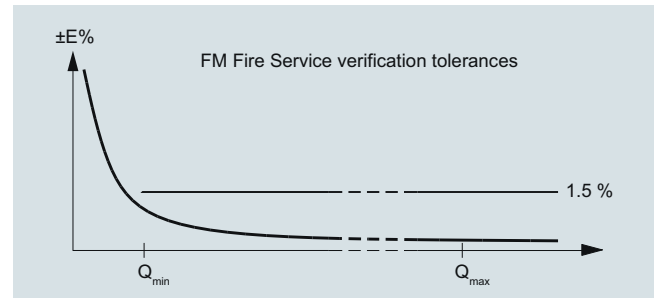

Flow Measurement

SITRANS F M

Flow sensor MAG 5100 W

MAG 5100 W (7ME6520) MI-001 verified and labeled products at a given Q3 and Q3/Q4 = 1.25 and Q2/Q1 = 1.6 measuring ranges see table below:

Order code: P11	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
„R“ Q3/Q1	40	40	40	40	40	40	40	40	40
Q4 [m³/h]	20	31.25	50	78.75	125	200	312.5	500	787.5
Q3 [m³/h]	16	25	40	63	100	160	250	400	630
Q2 [m³/h]	0.64	1.0	1.6	2.52	4.0	6.4	10.0	16.0	25.2
Q1 [m³/h]	0.4	0.63	1.0	1.58	2.5	4.0	6.25	10.0	15.75

Order code: P12	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
„R“ Q3/Q1	63	63	63	63	63	63	63	63	63
Q4 [m³/h]	20	31.25	50	78.75	125	200	312.5	500	787.5
Q3 [m³/h]	16							400	630
Q2 [m³/h]	0.41							10.2	16.0
Q1 [m³/h]	0.25							6.35	10.0



บริษัท เอ็มพี เอ็นจิเนียริ่ง ซิสเต็ม จำกัด
MP ENGINEERING SYSTEM CO., LTD.
92/3 Moo 8 Soi Mungkorn - Khundee 6 Theparak, Muang, Samutprakarn 10270
Mobile : +66 65 693 6515 : +66 2 101 9495 Fax : +66 2 755 4030
E-mail : sales.mpen@gmail.com , mpengineering@outlook.co.th



www.fvtech.com

Order code: P13	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
„R“ Q3/Q1	80	80	80	80	80	80	80	80	80
Q4 [m³/h]	20	31.25	50	78.75	125	200	312.5	500	787.5
Q3 [m³/h]	16	25	40	63	100	160	250	400	630
Q2 [m³/h]	0.32	0.5	0.8	1.26	2.0	3.2	5.0	8.0	12.6
Q1 [m³/h]	0.20	0.31	0.50	0.79	1.25	2.00	3.13	5.00	7.9

Order code: P16	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
„R“ Q3/Q1	160	160	160	160	160	160	160	160	160
Q4 [m³/h]	50	78.75	125	200	312.5	500	787.5	1250	2000
Q3 [m³/h]	40	63	100	160	250	400	630	1000	1600
Q2 [m³/h]	0.4	0.63	1.0	1.6	2.5	4.0	6.3	10.0	16.0
Q1 [m³/h]	0.25	0.39	0.63	1.0	1.56	2.5	3.94	6.3	10.0

Order code: P17	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
„R“ Q3/Q1	200	200	200	200	200	200	200	200	200
Q4 [m³/h]	50	78.75	125	200	312.5	500	787.5	1250	2000
Q3 [m³/h]	40	63	100	160	250	400	630	1000	1600
Q2 [m³/h]	0.32	0.50	0.80	1.28	2.0	3.2	5.0	8.0	12.8
Q1 [m³/h]	0.2	0.32	0.5	0.8	1.25	2.0	3.15	5.0	8.0

Order code: P18	DN 50 (2")	DN 65 (2½")	DN 80 (3")	DN 100 (4")	DN 125 (5")	DN 150 (6")	DN 200 (8")	DN 250 (10")	DN 300 (12")
„R“ Q3/Q1	250	250	250	250	250	250	250	250	250
Q4 [m³/h]	50	78.75	125	200	312.5	500	787.5	1250	2000
Q3 [m³/h]	40	63	100	160	250	400	630	1000	1600
Q2 [m³/h]	0.26	0.4	0.64	1.02	1.6	2.56	4.0	6.4	10.24
Q1 [m³/h]	0.16	0.25	0.4	0.64	1.0	1.6	2.52	4.0	6.4

Order code: P24	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
„R“ Q3/Q1	40	40	40	40	40
Q4 [m³/h]	1250	1250	2000	2000	3125
Q3 [m³/h]	1000	1000	1600	1600	2500
Q2 [m³/h]	40.0	40.0	64.0	64.0	100.0
Q1 [m³/h]	25.0	25.0	40.0	40.0	62.5

Order code: P25	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
„R“ Q3/Q1	63	63	63	63	63
Q4 [m³/h]	1250	2000	3125	3125	5000
Q3 [m³/h]	1000	1600	2500	2500	4000
Q2 [m³/h]	25.4	40.63	63.49	63.49	101.6
Q1 [m³/h]	15.9	25.4	39.7	39.7	63.49



Order code: P26	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
„R“ Q3/Q1	80	80	80	80	80
Q4 [m³/h]	2000	3125	5000	5000	7875
Q3 [m³/h]	1600	2500	4000	4000	6300
Q2 [m³/h]	32.0	50.0	80.0	80.0	126.0
Q1 [m³/h]	20.0	31.25	50.0	50.0	78.75


Order code: P27	DN 350 (14")	DN 400 (16")	DN 450 (18")	DN 500 (20")	DN 600 (24")
„R“ Q3/Q1	100	100	100	100	100
Q4 [m³/h]	3125	3125	5000	5000	7875
Q3 [m³/h]	2500	2500	4000	4000	6300
Q2 [m³/h]	40.0	40.0	64.0	64.0	100.8
Q1 [m³/h]	25.0	25.0	40.0	40.0	63.0

Order code: P29	DN 700 (28")	DN 750 (30")	DN 800 (32")	DN 900 (36")	DN 1000 (40")	DN 1200 (48")
„R“ Q3/Q1	40	40	40	40	40	40
Q4 [m³/h]	5000	5000	5000	7875	7875	7875
Q3 [m³/h]	4000	4000	4000	6300	6300	6300
Q2 [m³/h]	160.0	160.0	160.0	252.0	252.0	252.0
Q1 [m³/h]	100.0	100.0	100.0	157.5	157.5	157.5

Order code: P30	DN 700 (28")	DN 750 (30")	DN 800 (32")	DN 900 (36")	DN 1000 (40")	DN 1200 (48")
„R“ Q3/Q1	63	63	63	63	63	-
Q4 [m³/h]	5000	5000	5000	7875	7875	-
Q3 [m³/h]	4000	4000	4000	6300	6300	-
Q2 [m³/h]	101.6	101.6	101.6	160.0	160.0	-
Q1 [m³/h]	63.5	63.5	63.5	100.0	100.0	-

Order code: P31	DN 700 (28")	DN 750 (30")	DN 800 (32")	DN 900 (36")	DN 1000 (40")	DN 1200 (48")
„R“ Q3/Q1	80	80	80	80	80	-
Q4 [m³/h]	5000	5000	5000	7875	7875	-
Q3 [m³/h]	4000	4000	4000	6300	6300	-
Q2 [m³/h]	80.0	80.0	80.0	126.0	126.0	-
Q1 [m³/h]	50.0	50.0	50.0	78.75	78.75	-

The label is placed on the transmitter housing. An example of the product label is shown below:

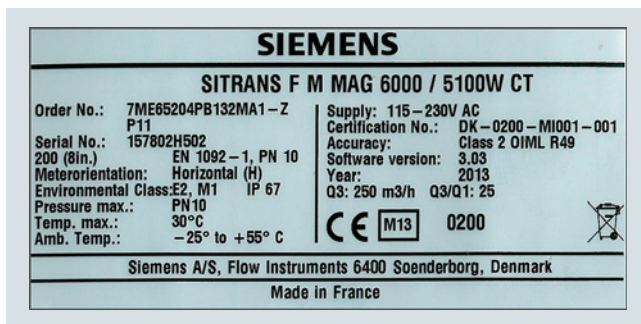

OIML R 49/MI-001 approvals valid for:

- DN 50 to DN 1200 (2" to 48")
- Horizontal and vertical installation
- Compact or remote with max. 500 m cable
- Power supply 115 to 230 V AC, 12 to 24 V AC/DC
- With or without communication module

Other restrictions may apply (see certificate).

Special OIML / MI-001 settings:

- Unit: m³
- Qmax: Q3
- Low flow cut-off: 0.1 %
- Digital output: Frequency

For other factory settings, see Operating Instructions.



Flow Measurement

SITRANS F M

Flow sensor MAG 5100 W

Selection and Ordering data	Article No.	Order Code
Sensor SITRANS F M MAG 5100 W	7 ME 6 5 2 0 -	
Hastelloy electrodes, carbon steel flanges, EU water markets and low flow applications		
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.		
Diameter		
DN 15 (½")	1 V	
DN 25 (1")	2 D	
DN 40 (1½")	2 R	
DN 50 (2")	2 Y	
DN 65 (2½")	3 F	
DN 80 (3")	3 M	
DN 100 (4")	3 T	
DN 125 (5")	4 B	
DN 150 (6")	4 H	
DN 200 (8")	4 P	
DN 250 (10")	4 V	
DN 300 (12")	5 D	
DN 350 (14")	5 K	
DN 400 (16")	5 R	
DN 450 (18")	5 Y	
DN 500 (20")	6 F	
DN 600 (24")	6 P	
DN 700 (28")	6 Y	
DN 750 (30")	7 D	
DN 800 (32")	7 H	
DN 900 (36")	7 M	
DN 1000 (40")	7 R	
(42")	7 U	
(44")	7 V	
DN 1200 (48")	8 B	
Flange norm and pressure rating		
EN 1092-1		
PN 10 (DN 200 ... 1200/8" ... 48")	B	
PN 16 (DN 50 ... 1200/2" ... 48")	C	
PN 16, non PED (DN 700 ... 1200/28" ... 48")	D	
PN 40 (DN 15 ... 40/½" ... 1½")	F	
ANSI B16.5		
class 150 (½" ... 24")	J	
AWWA C-207		
Class D (28" ... 48")	L	
AS 4087		
PN 16 (DN 50 ... 1200/2" ... 48")	N	
Flange material and coating		
Carbon steel flanges ASTM A 105, corrosion-resistant coating of category C4	1	
Carbon steel flanges ASTM A 105, 300 µm corrosion-resistant coating of category C4	4	
Liner material		
EPDM	2	
NBR Hard Rubber	3	

Selection and Ordering data	Article No.	Order Code
Sensor SITRANS F M MAG 5100 W	7 ME 6 5 2 0 -	
Hastelloy electrodes, carbon steel flanges, EU water markets and low flow applications		
Transmitter		
Sensor for remote transmitter (Order transmitter separately)	A	
MAG 6000 I, Aluminum, 18 ... 90 V DC, 115 ... 230 V AC	C	
MAG 6000, Polyamid, 11 ... 30 V DC/11 ... 24 V AC	H	
MAG 6000, Polyamid, 115 ... 230 V AC	J	
MAG 5000, Polyamid, 11 ... 30 V DC/11 ... 24 V AC	K	
MAG 5000, Polyamid, 115 ... 230 V AC	L	
MAG 6000 CT, Polyamid, 115 ... 230 V AC	M	
MAG 6000 CT, Polyamid, 11 ... 30 V DC/11 ... 24 V AC	R	
<u>Transmitter including wall-mounting kit for remote design</u>		
MAG 5000, Polyamid, 115 ... 230 V AC, incl. special wall-mounting unit (approved marine equipment)		
• M20x1.5 cable glands	Z	P 0 C
• ½" NPT cable glands	Z	P 0 D
MAG 6000, Polyamid, 115 ... 230 V AC, incl. special wall-mounting unit (approved marine equipment)		
• M20x1.5 cable glands	Z	P 0 G
• ½" NPT cable glands	Z	P 0 H
MAG 6000 CT, Polyamid, 11 ... 30 V DC/11 ... 24 V AC, incl. wall-mounting unit		
• M20x1.5 cable glands	Z	P 0 J
• ½" NPT cable glands	Z	P 0 K
MAG 6000 CT, Polyamid, 115 ... 230 V AC, incl. wall-mounting unit		
• M20x1.5 cable glands	Z	P 0 L
• ½" NPT cable glands	Z	P 0 M
Communication		
None	A	
HART	B	
PROFIBUS PA Profile 3 (only MAG 6000/ MAG 6000 I)	F	
PROFIBUS DP Profile 3 (only MAG 6000/ MAG 6000 I)	G	
Modbus RTU/RS 485 (only MAG 6000/ MAG 6000 I)	E	
FOUNDATION Fieldbus H1 (only MAG 6000/ MAG 6000 I)	J	
Cable glands/terminal box		
Metric: Polyamide terminal box or MAG 6000 I compact	1	



Selection and Ordering data	Order code	Selection and Ordering data	Order code
Additional information			
Please add “-Z” to Article No. and specify Order code(s) and plain text.			
Certificates			
• Pressure test certificate according to EN 10204-3.1	C01	• Without verification according to OIML R 49 (DN 350 ... DN 600)	P23
• Material certificate according to EN 10204-3.1	C12	• MI-001 Q3/Q1 = 40 (DN 350 ... DN 600)	P24
• Factory certificate according to EN 10204-2.2	C14	• MI-001 Q3/Q1 = 63 (DN 350 ... DN 600)	P25
• Factory certificate according to EN 10204-2.1	C15	• MI-001 Q3/Q1 = 80 (DN 350 ... DN 600)	P26
		• MI-001 Q3/Q1 = 100 (DN 350 ... DN 600)	P27
Special calibration		• Without verification according to OIML R 49 (DN 700 ... DN 1200)	P28
• 5-point calibration for DN 15 ... DN 200 ¹⁾	D01	• MI-001 Q3/Q1 = 40 (DN 700 ... DN 1200)	P29
• 5-point calibration for DN 250 ... DN 600 ¹⁾	D02	• MI-001 Q3/Q1 = 63 (DN 700 ... DN 1200)	P30
• 5-point calibration for DN 700 ... DN 1200 ¹⁾	D03	• MI-001 Q3/Q1 = 80 (DN 700 ... DN 1200)	P31
• 10-point calibration for DN 15 ... DN 200 ²⁾	D06	FM Fire Service Approval (with ANSI B16.5 Class 150 flanges)	
• 10-point calibration for DN 250 ... DN 600 ²⁾	D07	• DN 50, DN 80 and DN 100 (2", 3" and 4")	P20
• 10-point calibration for DN 700 ... DN 1200 ²⁾	D08	• DN 150 and DN 200 (6" and 8")	P21
		• DN 250 and DN 300 (10" and 12")	P22
• Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 15 ... DN 200	D11	Region/customer specific labels	
• Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 250 ... DN 600	D12	• Chinese label	W06
• Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 700 ... DN 1200	D13	• KCC label (South Korea)	W28
• 5-point, matched-pair calibration for DN 15 ... DN 200 ¹⁾	D15	• FP2E label (France)	H20
• 5-point, matched-pair calibr. for DN 250 ... DN 600 ¹⁾	D16	Tag name plate, stainless steel (specify in plain text)	Y17
• 5-point, matched-pair calibr. for DN 700 ... DN 1200 ¹⁾	D17	Tag name plate, plastic (self-adhesive)	Y18
• 10-point, matched-pair calibration for DN 15 ... DN 200 ²⁾	D18	Customer-specific transmitter setting	Y20
• 10-point, matched-pair calibr. for DN 250 ... DN 600 ²⁾	D19	Factory mounted sensor cables	
• 10-point, matched-pair calibr. for DN 700 ... DN 1200 ²⁾	D20	• Sensor cables wired (specify Article No. for sensor cables and order cables separately or specify K-option)	Y40
		• Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately or specify K-option)	Y41
Country of origin		Special version (specify in plain text)	Y99
• France	F55	Additional calibrations	
Sensor cables		• Accredited Siemens Flow Instruments matched pair calibration acc. to ISO/IEC 17025:2005	On request ⁴⁾
• Standard coil and electrode cable, PVC jacket		• Customer-witnessed calibration	On request ⁴⁾
- 5 m (16 ft)	K01	Any of above calibration	
- 10 m (33 ft)	K02		
- 20 m (65 ft)	K04		
- 30 m (98 ft)	K06		
- 40 m (131 ft)	K07		
- 50 m (164 ft)	K08		
- 60 m (197 ft)	K09		
- 100 m (328 ft)	K10		
- 150 m (492 ft)	K11		
- 200 m (656 ft)	K12		
- 500 m (1640 ft)	K13		
• Standard coil and special electrode cable, PVC jacket			
- 5 m (16 ft)	K51		
- 10 m (33 ft)	K52		
- 20 m (65 ft)	K54		
- 30 m (98 ft)	K56		
- 40 m (131 ft)	K57		
- 50 m (164 ft)	K58		
- 60 m (197 ft)	K59		
- 100 m (328 ft)	K60		
- 150 m (492 ft)	K61		
- 200 m (656 ft)	K62		
- 500 m (1640 ft)	K63		
Terminal blocks			
• Factory mounted terminal blocks	N02		
Approval/Verification ³⁾			
• Without verification acc. to OIML R 49 (DN 50 ... DN 300)	P10		
• MI-001 Q3/Q1 = 40 (DN 50 ... DN 300)	P11		
• MI-001 Q3/Q1 = 63 (DN 50 ... DN 300)	P12		
• MI-001 Q3/Q1 = 80 (DN 50 ... DN 300)	P13		
• MI-001 Q3/Q1 = 160 (DN 50 ... DN 300)	P16		
• MI-001 Q3/Q1 = 200 (DN 50 ... DN 300)	P17		
• MI-001 Q3/Q1 = 250 (DN 50 ... DN 300)	P18		

• Without verification according to OIML R 49 (DN 350 ... DN 600)		P23
• MI-001 Q3/Q1 = 40 (DN 350 ... DN 600)		P24
• MI-001 Q3/Q1 = 63 (DN 350 ... DN 600)		P25
• MI-001 Q3/Q1 = 80 (DN 350 ... DN 600)		P26
• MI-001 Q3/Q1 = 100 (DN 350 ... DN 600)		P27
• Without verification according to OIML R 49 (DN 700 ... DN 1200)		P28
• MI-001 Q3/Q1 = 40 (DN 700 ... DN 1200)		P29
• MI-001 Q3/Q1 = 63 (DN 700 ... DN 1200)		P30
• MI-001 Q3/Q1 = 80 (DN 700 ... DN 1200)		P31
FM Fire Service Approval (with ANSI B16.5 Class 150 flanges)		
• DN 50, DN 80 and DN 100 (2", 3" and 4")		P20
• DN 150 and DN 200 (6" and 8")		P21
• DN 250 and DN 300 (10" and 12")		P22
Region/customer specific labels		
• Chinese label		W06
• KCC label (South Korea)		W28
• FP2E label (France)		H20
Tag name plate, stainless steel (specify in plain text)		Y17
Tag name plate, plastic (self-adhesive)		Y18
Customer-specific transmitter setting		Y20
Factory mounted sensor cables		
• Sensor cables wired (specify Article No. for sensor cables and order cables separately or specify K-option)		Y40
• Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and order cables separately or specify K-option)		Y41
Special version (specify in plain text)		Y99
Additional calibrations		
• Accredited Siemens Flow Instruments matched pair calibration acc. to ISO/IEC 17025:2005		On request ⁴⁾
• Customer-witnessed calibration		On request ⁴⁾
Any of above calibration		
1) 20 %, 40 %, 60 %, 80 %, 100 % of factory Q _{max}		
2) Ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q _{max}		
3) For more details and references of the ranges please see the tables on page 3/94.		
4) Product Variation Request (PVR).		

Operating instructions for SITRANS F M MAG 5100 W		
Description	Article No.	
• English	A5E03063678	
• German	A5E03376527	
All literature is available to download for free, in a range of languages, at www.siemens.com/processinstrumentation/documentation		
Accessories		
Description	Article No.	
Potting kit for IP68/NEMA 6P sealing of sensor junction box	FDK:085U0220	

MAG 5000/6000 transmitters and sensors are packed in separate boxes, the final assembly takes place during installation at the customer's place. MAG 6000 I transmitters and sensors are delivered compact mounted from factory. Communication module will be pre-mounted in the transmitter. Please use online Product selector to get latest updates. Product selector link: www.pia-portal.automation.siemens.com



MP Engineering

บริษัท เอ็มพี เอ็นจิเนียริ่ง ซิสเต็ม จำกัด
MP ENGINEERING SYSTEM CO., LTD.
92/3 Moo 8 Soi Mungkorn - Khundee 6 Theparak, Muang, Samutprakarn 10270
Mobile : +66 85 693 6515 : +66 2 101 9495 Fax : +66 2 755 4030



Flow Measurement

SITRANS F M

Flow sensor MAG 5100 W

Selection and Ordering data	Article No.
Sensor SITRANS F M MAG 5100 W	7 ME 6 5 8 0 -
Hastelloy electrodes, carbon steel flanges, Non EU water markets	
Click on the Article No. for the online configuration in the PIA Life Cycle Portal.	
Diameter	
DN 25 (1")	2 D
DN 40 (1½")	2 R
DN 50 (2")	2 Y
DN 65 (2½")	3 F
DN 80 (3")	3 M
DN 100 (4")	3 T
DN 125 (5")	4 B
DN 150 (6")	4 H
DN 200 (8")	4 P
DN 250 (10")	4 V
DN 300 (12")	5 D
DN 350 (14")	5 K
DN 400 (16")	5 R
DN 450 (18")	5 Y
DN 500 (20")	6 F
DN 600 (24")	6 P
DN 700 (28")	6 Y
DN 750 (30")	7 D
DN 800 (32")	7 H
DN 900 (36")	7 M
DN 1000 (40")	7 R
(42")	7 U
(44")	7 V
DN 1200 (48")	8 B
DN 1400 (54")	8 F
DN 1500 (60")	8 K
DN 1600 (66")	8 P
DN 1800 (72")	8 T
DN 2000 (78")	8 Y
Flange norm and pressure rating	
<u>EN 1092-1</u>	
PN 6 (DN 1400 ... 2000 (54" ... 78")) ¹⁾	A
PN 10 (DN 200 ... 2000 (8" ... 78")) ¹⁾	B
PN 16 (DN 65 ... 600 (2½" ... 24"))	C
PN 16, non-PED (DN 700 ... 2000 (28" ... 78"))	D
PN 40 (DN 25 ... 50 (1" ... 2"))	F
<u>ANSI B16.5</u>	
class 150 (1" ... 24")	J
<u>AWWA C-207</u>	
Class D (28" ... 78") ¹⁾	L
<u>AS 4087</u>	
PN 16 (DN 50 ... 1200 (2" ... 48"))	N
<u>JIS</u>	
B 2220:2004 K10 (1" ... 24")	R
Flange material and coating	
Carbon steel flanges ASTM A 105, corrosion-resistant coating of category C4	1
Carbon steel flanges ASTM A 105, 300 µm corrosion-resistant coating of category C4	4
Liner material	
Ebonite Hard Rubber	4
Electrode material	
Hastelloy	2

Selection and Ordering data	Article No.
Sensor SITRANS F M MAG 5100 W	7 ME 6 5 8 0 -
Hastelloy electrodes, carbon steel flanges, Non EU water markets	
Transmitter with display	
Sensor for remote transmitter (Order transmitter separately)	A
MAG 6000, Polyamid, 11 ... 30 V DC/11 ... 24V AC	H
MAG 6000, Polyamid, 115 ... 230 V AC	J
MAG 5000, Polyamid, 11 ... 30 V DC/11 ... 24V AC	K
MAG 5000, Polyamid, 115 ... 230 V AC	L
Communication	
No communication, add-on possible	A
HART	B
PROFIBUS PA Profile 3 (only MAG 6000)	F
PROFIBUS DP Profile 3 (only MAG 6000)	G
Modbus RTU/RS 485 (only MAG 6000)	E
FOUNDATION Fieldbus H1 (only MAG 6000)	J
Cable glands/terminal box	
Metric: Polyamide terminal box or MAG 6000 I compact	1
½" NPT: Polyamide terminal box or MAG 6000 I compact	2

¹⁾ DN 1400 to DN 2000 (54" to 78") do not conform to PED or CRN.



Selection and Ordering data	Order code
Additional information	
Please add “-Z” to Article No. and specify Order code(s) and plain text.	
Certificates	
Pressure test certificate according to EN 10204-3.1	C01
Factory certificate according to EN 10204-2.2	C14
Factory certificate according to EN 10204-2.1	C15
Special calibration	
• 5-point calibration for DN 15 ... DN 200 ¹⁾	D01
• 5-point calibration for DN 250 ... DN 600 ¹⁾	D02
• 5-point calibration for DN 700 ... DN 1200 ¹⁾	D03
• 10-point calibration for DN 15 ... DN 200 ²⁾	D06
• 10-point calibration for DN 250 ... DN 600 ²⁾	D07
• 10-point calibration for DN 700 ... DN 1200 ²⁾	D08
• Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 15 ... DN 200	D11
• Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 250 ... DN 600	D12
• Default (2 x 25 % and 2 x 90 %) match-pair calibration for DN 700 ... DN 1200	D13
• 5-point, matched-pair calibration for DN 15 ... DN 200 ¹⁾	D15
• 5-point, matched-pair calibration for DN 250 ... DN 600 ¹⁾	D16
• 5-point, matched-pair calibration for DN 700 ... DN 1200 ¹⁾	D17
• 10-point, matched-pair calibration for DN 15 ... DN 200 ²⁾	D18
• 10-point, matched-pair calibration for DN 250 ... DN 600 ²⁾	D19
• 10-point, matched-pair calibration for DN 700 ... DN 1200 ²⁾	D20
Terminal blocks	
• Factory mounted terminal blocks	N02
Region/customer specific labels	
• Chinese label	W06
• KCC label (South Korea)	W28
Tag name plate, stainless (specify in plain text)	Y17
Tag name plate, plastic (self-adhesive)	Y18
Customer-specific transmitter setting	Y20
Sensor cables wired (specify Article No. for sensor cables and order cables separately)	Y40
Sensor cables wired and IP68 sealing (specify Article No. for sensor cables and cables cable separately)	Y41
Special version (specify in plain text)	Y99

¹⁾ 20 %, 40 %, 60 %, 80 %, 100 % of factory Q_{max}

²⁾ Ascending and descending at 20 %, 40 %, 60 %, 80 %, 100 % of factory Q_{max}

Operating instructions for SITRANS F M MAG 5100 W

Description	Article No.
• German	A5E03376527
• English	A5E03063678

All literature is available to download for free, in a range of languages, at www.siemens.com/processinstrumentation/documentation

Accessories

Description	Article No.
Potting kit for IP68/ NEMA 6P sealing of sensor junction box	FDK:085U0220



MAG 5000/6000 transmitters and sensors are packed in separate boxes, the final assembly takes place during installation at the customer's site.

Communication module will be pre-mounted in the transmitter.

Please use online Product selector to get latest updates.

Product selector link: www.pia-portal.automation.siemens.com




Flow Measurement

SITRANS F M

Flow sensor MAG 5100 W

Dimensional drawings

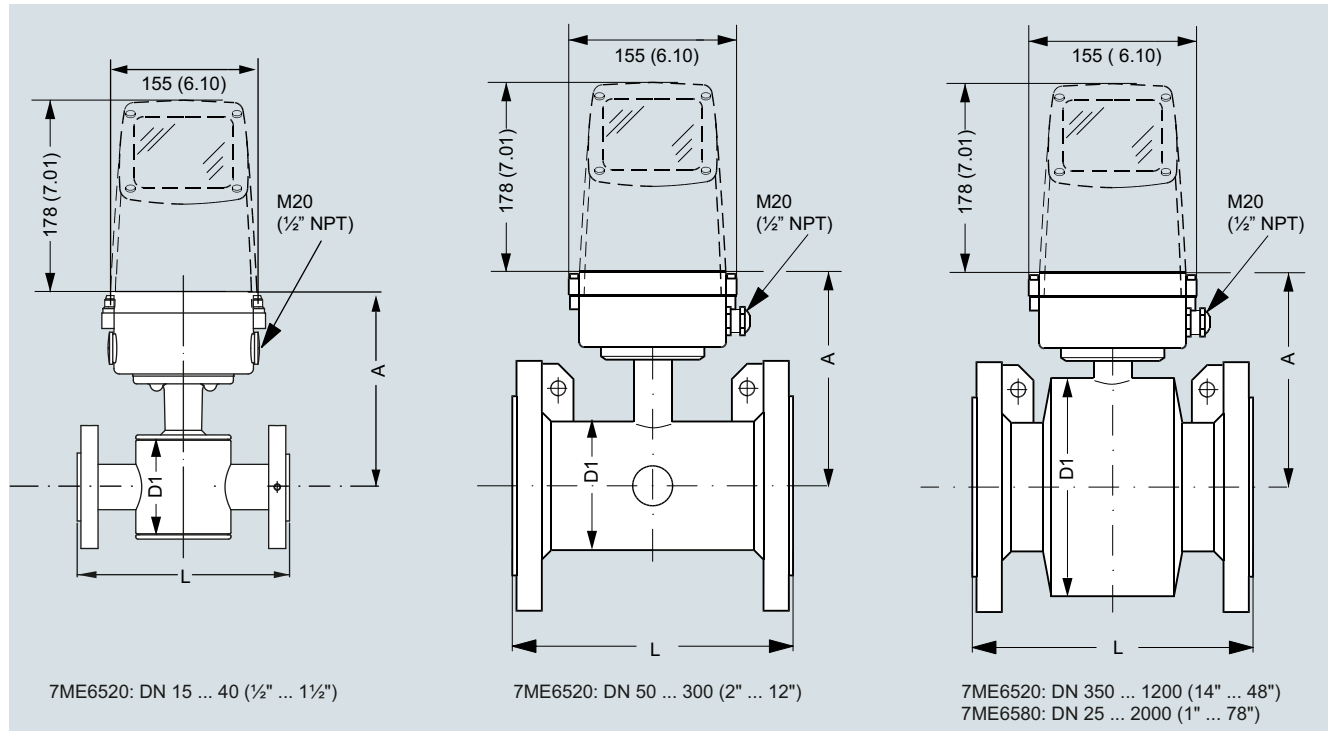

7ME6520 NBR or EPDM liner						7ME6580 Ebonite liner					
Nominal size A		D1				A		D1		L ¹⁾	
[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
15	$\frac{1}{2}$	177	7.0	77	3.0	-	-	-	-	200	7.9
25	1	187	7.4	96	3.8	187	7.4	104	4.09	200	7.9
40	$1\frac{1}{2}$	202	8.0	127	5.0	197	7.8	124	4.88	200	7.9
50	2	188	7.4	76	3.0	205	8.1	139	5.47	200	7.9
65	$2\frac{1}{2}$	194	7.6	89	3.5	212	8.3	154	6.06	200	7.9
80	3	200	7.9	102	4.0	222	8.7	174	6.85	200	7.9
100	4	207	8.1	114	4.5	242	9.5	214	8.43	250	9.8
125	5	217	8.5	140	5.5	255	10.0	239	9.41	250	9.8
150	6	232	9.1	168	6.6	276	10.9	282	11.1	300	11.8
200	8	257	10.1	219	8.6	304	12.0	338	13.31	350	13.8
250	10	284	11.2	273	10.8	332	13.1	393	15.47	450	17.7
300	12	310	12.2	324	12.8	357	14.1	444	17.48	500	19.7
350	14	382	15.0	451	17.8	362	14.3	451	17.76	550	21.7
400	16	407	16.0	502	19.8	387	15.2	502	19.76	600	23.6
450	18	438	17.2	563	22.2	418	16.5	563	22.16	600	23.6
500	20	463	18.2	614	24.2	443	17.4	614	24.17	600	23.6
600	24	514	20.2	715	28.2	494	19.4	715	28.15	600	23.6
700	28	564	22.2	816	32.1	544	21.4	816	32.13	700	27.6
750	30	591	23.3	869	34.2	571	22.5	869	34.21	750	29.5
800	32	616	24.3	927	36.5	606	23.9	927	36.5	800	31.5
900	36	663	26.1	1032	40.6	653	25.7	1032	40.63	900	35.4
1000	40	714	28.1	1136	44.7	704	27.7	1136	44.72	1000	39.4
	42	714	28.1	1136	44.7	704	27.7	1136	44.72	1000	39.4
	44	765	30.1	1238	48.7	755	29.7	1238	48.74	1100	43.3
1200	48	820	32.3	1348	53.1	810	31.9	1348	53.07	1200	47.2
1400	54	-	-	-	-	925	36.4	1574	65.94	1400	55.1
1500	60	-	-	-	-	972	38.2	1672	65.83	1500	59.1
1600	66	-	-	-	-	1025	40.4	1774	75.39	1600	63
1800	72	-	-	-	-	1123	44.2	1974	77.72	1800	70.9
2000	78	-	-	-	-	1223	48.1	2174	85.59	2000	78.7


¹⁾ Tolerances on built-in length:

DN 15 to DN 200 ($\frac{1}{2}$ " to 8"): +0/-3 mm (+0/-0.12"), DN 250 to DN 400 (10" to 16"): +0/-5 mm (+0/-0.20"),

DN 450 to DN 600 (18" to 24"): +5/-5 mm (+0.20/-0.20"), DN 700 to DN 2000 (28" to 78"): +10/-10 mm (+0.39/-0.39")



MAG 5100 W/6000 | Compact

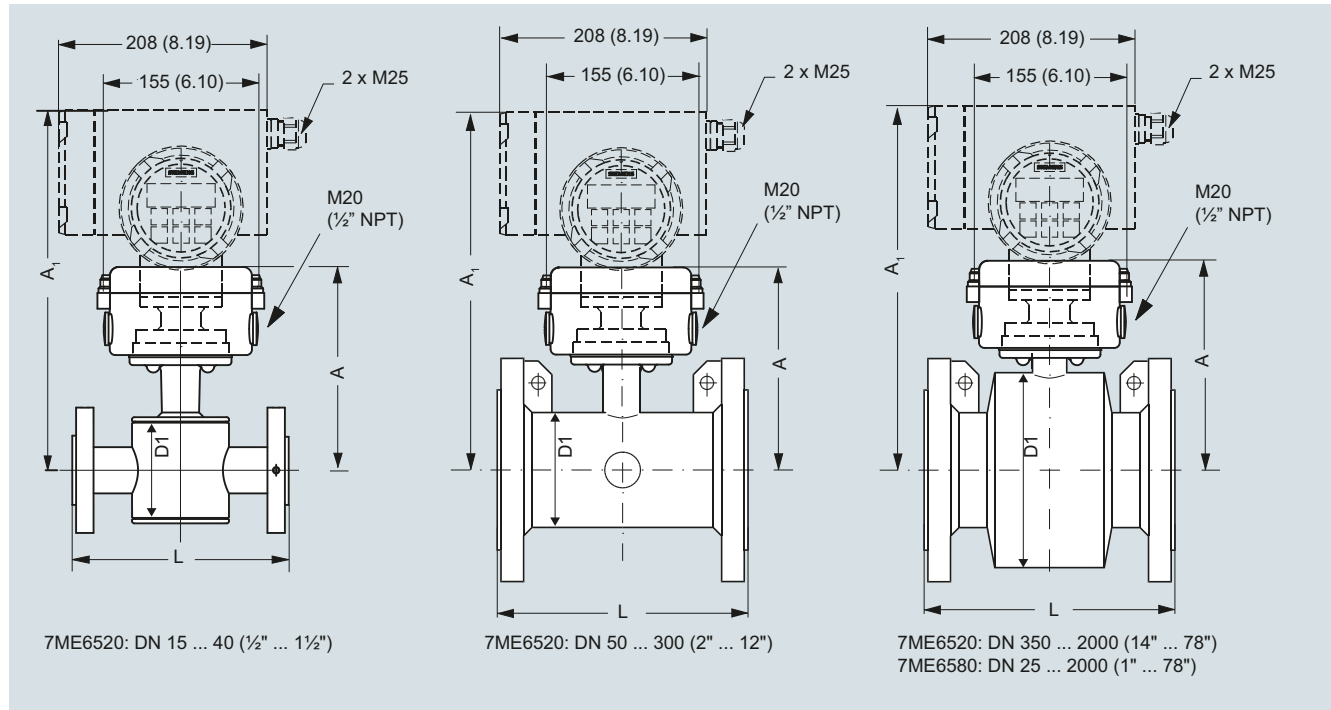

7ME6520 NBR or EPDM liner								7ME6580 Ebonite liner								L ¹⁾	
Nominal size	A	A1	D1					A	A1	D1							
[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]	[mm] [inch]
15 1/2	177 7.0	331 13.0	77 3.0					187 7.4	-	-	-	-				200 7.9	
25 1	187 7.4	341 13.4	96 3.8					187 7.4	341 13.4	104 4.09						200 7.9	
40 1 1/2	202 8.0	356 14.0	127 5.0					197 7.8	351 13.8	124 4.88						200 7.9	
50 2	188 7.4	342 13.5	76 3.0					205 8.1	359 14.1	139 5.47						200 7.9	
65 2 1/2	194 7.6	348 13.7	89 3.5					212 8.3	366 14.4	154 6.06						200 7.9	
80 3	200 7.9	354 14.0	102 4.0					222 8.7	376 14.8	174 6.85						200 7.9	
100 4	207 8.1	361 14.2	114 4.5					242 9.5	396 15.6	214 8.43						250 9.8	
125 5	217 8.5	371 14.6	140 5.5					255 10.0	409 16.1	239 9.41						250 9.8	
150 6	232 9.1	386 15.2	168 6.6					276 10.9	430 16.9	282 11.1						300 11.8	
200 8	257 10.1	411 16.2	219 8.6					304 12.0	458 18.0	338 13.31						350 13.8	
250 10	284 11.2	438 17.2	273 10.8					332 13.1	486 19.1	393 15.47						450 17.7	
300 12	310 12.2	464 18.3	324 12.8					357 14.1	511 20.1	444 17.48						500 19.7	
350 14	382 15.0	536 21.1	451 17.8					362 14.3	516 20.3	451 17.76						550 21.7	
400 16	407 16.0	561 22.1	502 19.8					387 15.2	541 21.3	502 19.76						600 23.6	
450 18	438 17.2	592 23.3	563 22.2					418 16.5	572 22.5	563 22.16						600 23.6	
500 20	463 18.2	617 24.3	614 24.2					443 17.4	597 23.5	614 24.17						600 23.6	
600 24	514 20.2	668 26.3	715 28.2					494 19.4	648 25.5	715 28.15						600 23.6	
700 28	564 22.2	718 28.3	816 32.1					544 21.4	698 27.5	816 32.13						700 27.6	
750 30	591 23.3	745 29.3	869 34.2					571 22.5	725 28.5	869 34.21						750 29.5	
800 32	616 24.3	770 30.3	927 36.5					606 23.9	760 29.9	927 36.5						800 31.5	
900 36	663 26.1	817 32.2	1032 40.6					653 25.7	807 31.8	1032 40.63						900 35.4	
1000 40	714 28.1	868 34.2	1136 44.7					704 27.7	858 33.8	1136 44.72						1000 39.4	
42	714 28.1	868 34.2	1136 44.7					704 27.7	858 33.8	1136 44.72						1000 39.4	
44	765 30.1	919 36.2	1238 48.7					755 29.7	904 35.6	1238 48.74						1100 43.3	
1200 48	820 32.3	974 38.3	1348 53.1					810 31.9	964 38.0	1348 53.07						1200 47.2	
1400 54	-	-	-					925 36.4	1079 42.5	1574 61.97						1400 55.1	
1500 60	-	-	-					972 38.2	1126 44.3	1672 65.83						1500 59.1	
1600 66	-	-	-					1025 40.4	1179 46.4	1774 69.84						1600 63.0	
1800 72	-	-	-					1123 44.2	1277 50.3	1974 77.72						1800 70.9	
2000 78	-	-	-					1223 48.1	1377 54.2	2174 85.59						2000 78.7	

1) Tolerances on built-in length:

DN 15 to DN 200 (1/2" to 8"): +0/-3 mm (+0/-0.12"), DN 250 to DN 400 (10" to 16"): +0/-5 mm (+0/-0.20"),

DN 450 to DN 600 (18" to 24"): +5/-5 mm (+0.20/-0.20"), DN 700 to DN 2000 (28" to 78"): +10/-10 mm (+0.39/-0.39")



Flow Measurement

SITRANS F M

Flow sensor MAG 5100 W

Weight

Nominal size		7ME6520 NBR or EPDM liner										7ME6580 Ebonite liner	
		PN 10		PN 16		PN 40		Class 150/AWWA		AS		PN 16	
[mm]	[inch]	[kg]	[lb]	[kg]	[lb]	[kg]	[lb]	[kg]	[lb]	[kg]	[lb]	[kg]	[lb]
15	½	-	-	-	-	4	9	4	9	4	9	5	11
25	1	-	-	-	-	6	12	5	11	4	9	5	11
40	1½	-	-	-	-	8	18	7	15	7	15	8	17
50	2	-	-	9	20	-	-	8	20	9	20	9	20
65	2½	-	-	10.7	24	-	-	11	24	10.7	24	11	24
80	3	-	-	11.6	26	-	-	13	28	11.6	26	12	26
100	4	-	-	15.2	33	-	-	19	41	15.2	33	16	35
125	5	-	-	20.4	45	-	-	24	52	-	-	19	42
150	6	-	-	26	57	-	-	29	64	26	57	27	60
200	8	48	106	48	106	-	-	56	124	48	106	40	88
250	10	64	141	69	152	-	-	79	174	69	152	60	132
300	12	76	167	86	189	-	-	110	243	86	189	80	176
350	14	104	229	125	274	-	-	139	307	115	254	110	242
400	16	119	263	143	314	-	-	159	351	125	277	125	275
450	18	136	299	173	381	-	-	182	400	141	311	175	385
500	20	163	359	223	491	-	-	225	495	189	418	200	440
600	24	236	519	338	744	-	-	320	704	301	664	287	633
700	28	270	595	314	692	-	-	273	602	320	704	330	728
750	30	-	-	-	-	-	-	329	725	-	-	360	794
800	32	346	763	396	873	-	-	365	804	428	944	450	992
900	36	432	951	474	1043	-	-	495	1089	619	1362	530	1168
1000	40	513	1130	600	1321	-	-	583	1282	636	1399	660	1455
42	-	-	-	-	-	-	-	687	1512	-	-	-	-
44	-	-	-	-	-	-	-	763	1680	-	-	1140	2513
1200	48	643	1415	885	1948	-	-	861	1896	813	1789	1180	2601
1400	54	1592	3510	-	-	-	-	-	-	-	-	1600	3528
1500	60	-	-	-	-	-	-	-	-	-	-	2460	5423
1600	66	2110	4652	-	-	-	-	-	-	-	-	2525	5566
1800	72	2560	5644	-	-	-	-	-	-	-	-	2930	6460
2000	78	3640	8025	-	-	-	-	-	-	-	-	3665	8080

With transmitter MAG 5000 and MAG 6000 compact, weight is increased by approximately 0.8 kg (1.8 lb), with MAG 6000 I, weight is increased by 5.5 kg (12.1 lb).

