



PRODUCT PARAMATER




Basic Parameter

Model	ULR-B1	ULR-C1	ULR-D1	ULR-B2/C2/D2
Type	Integrated type			Split type
Measuring range (meter)	1m, 2m	5m, 8m, 10m, 15m	20m, 25m, 30m, 40m	0.06 - 40m (Optional)
Blind area	Small blind area	Standard Type	Max	
Angle Beam	<6°	<10°	<10°	<12°
Accuracy	±0.3% F.S			±0.3% F.S
Display	1) No display 2) Display : LCD,LED,OLED (Optional)			LCD , TFT (Optional)
Power	DC12 – 28V,AC220V (Optional)			
Electric connection	PG7	M20*1.5	M20*1.5	PG7,M20*1.5 (Optional)
Process connection	G 1 1/2 (1m,2m) M60*2 (5m-15m) DN 80 flange connection (20m-40m) (Optional)			
Output	Analog output: 0-20mA; 4-20mA; 0-5V; 0-10V Digital output : RS485 (Mod_bus) Switch output : PNP/Relay output			
Housing material	ABS,nylon,Cast aluminum, SS304 (Optional)			
Protection grade	IP65 (Customized for IP67,IP68)			IP66 (Customized for IP67,IP68)
Explosion-proof	N/A, Explosion-proof (Optional)			
Corrosion-proof	N/A, Explosion-proof (Optional)			

PRODUCT PARAMATER



Detail & Installation

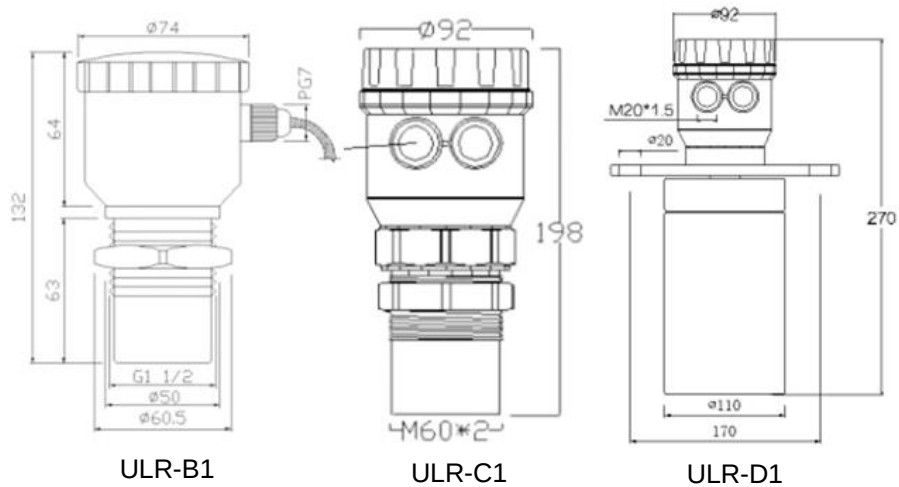

ULR-Series-RS-485

PRODUCT PARAMATER



Related Ultrasonic Level Sensor



ULR-A1 Standard type ultrasonic level meter



ULR-B1 Small range ultrasonic level sensor



ULR-C1 Standard range ultrasonic level sensor



ULR-D1 Wide range ultrasonic level sensor



ULR-A1 Explosion proof type ultrasonic level meter



ULR-B1 Anti corrosive probe ultrasonic level sensor



Split ultrasonic level sensor



Wireless level transmitter

PRODUCT PARAMATER



Application Field

Pump house, collection well, biochemical reaction tank, sedimentation tank, etc.

