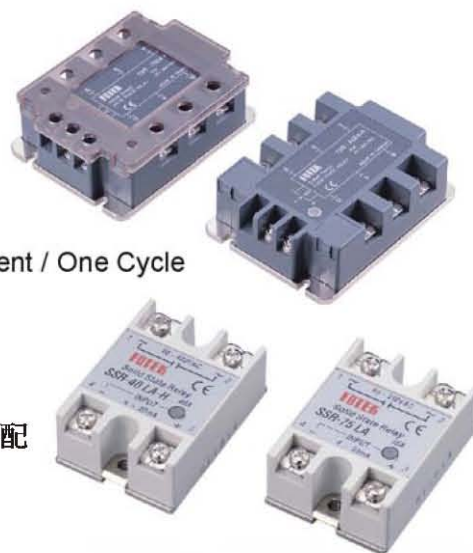


- ★ High Reliability by S.M.T. & TQC.
(Surface Mounting Technology)
- ★ High Isolation over than 50MΩ / 500VDC
- ★ High Dielectric over than 2.5KV
- ★ Low Enable Current less than 7.5mA / 12VDC
C MOS IC or TTL Compatible.
- ★ Low EMI / EFI & Surge by Zero Cross Trigger Method.
- ★ High Surge Current Duration Over 10 Times of Rated Current / One Cycle
- ★ High Surge Voltage Duration by Snubber Circuit.
- ★ 表面貼焊技術及全面品質管，提供最可靠的 SSR
- ★ 高絕緣阻抗超過 50MΩ / 500VDC
- ★ 高耐壓超過 2.5KV
- ★ 低觸發電流小於 7.5mA / 12VDC，可與 CMOS IC 及 TTL 匹配
- ★ 零點觸發方式避免電磁 / 高頻干擾
- ★ 高耐過電流，超過10倍額定電流/一週期
- ★ 具緩衝迴路可吸收瞬間突破



Guiding of Model

Terminal Type

Ex.SSR-40DA-H

① ② ③ ④ ⑤

① Product 產品別

SSR:SINGLE PHASE SOLID STATE RELAY
單相固態繼電器
STR:THREE PHASE SOLID STATE RELAY
三相固態繼電器

② Output Current 輸出電流

10 : 10A 25 : 25A
40 : 40A 50 : 50A
75 : 75A

③ Input Voltage 輸入方式

D:DC3W~32V<ON/OFF>
A:AC80~250V<ON/OFF>
L:4~20mA(linear)
V:VARIABLE RESISTER

④ Output Voltage 輸出電壓

A:AC VOLTAGE
D:DC VOLTAGE

⑤ Output Voltage Range 輸出電壓範圍

H : High Voltage Type < 90 ~ 480VAC >
Non: Standard Type < 24 ~ 380VAC >

PCB Type

Ex.SSR-P03DA

① ② ③ ④ ⑤

① Product 產品別

SSR : SINGLE PHASE SOLID STATE

② Mounting Method 固定方式

PCB:PCB TYPE

③ Output Current 輸出電流

03 = 3A
05 = 5A

④ Input Method 輸入方式

D : DC VOLTAGE

⑤ Output Voltage 輸出電壓

D : DC 5 ~ 60V
A : AC 24 ~ 280V

Control Method

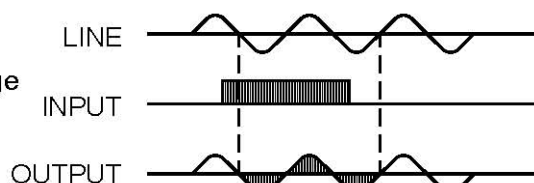
Zero Cross Trigger Method

Output TURN ON or TURN OFF

only on Zero Cross Point of sine wave , may avoid surge or EMI / RFI occurring.

Specially suited to control resistive , capacitive and Non - saturated inductive loads.

輸出只在正弦波的零點才會動作或復歸，可避免生突波或 EM / RFI，特別適於控制阻抗性，電容性和不飽和感性等負載。

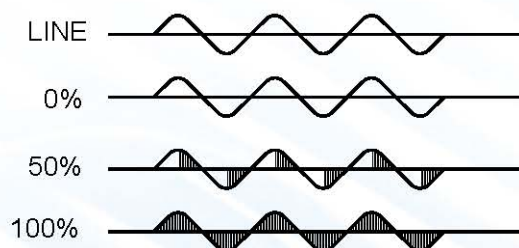


Variable Resistance Control Method







< Trimmer Control Method >

Power Output is Controlled by the Trigger Angle of Triac with Variable Resistor 250K Ω /110VAC, 500K Ω /220VAC

輸出功率以可變電阻 250K Ω /110VAC, 500K Ω /220VAC 控制 Triac 觸發角決定輸出功率。

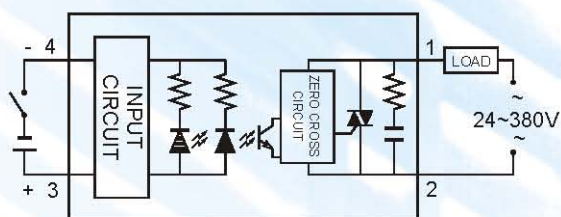


Application Hints

Input	NPN	Output	NO	Input	PNP	Output	NO	Input	L.S.	Output	NO
											
Input	NPN	Output	NC	Input	PNP	Output	NC	Latch Circuit (AC to AC)			
											

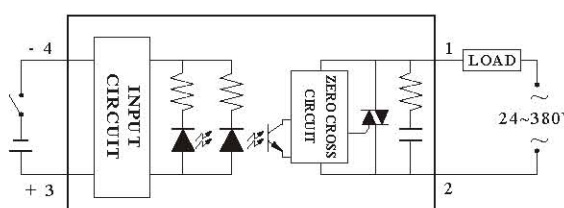
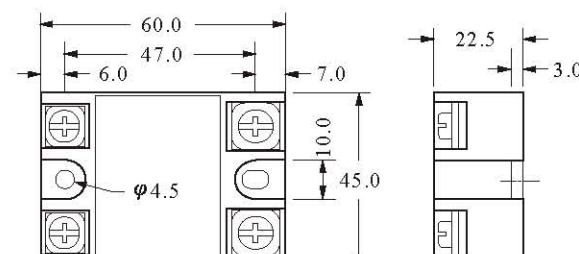
■ Specification

Type	Terminal Type					PCB Type
Model	SSR-10DA	SSR-25DA	SSR-40DA	SSR-25DA-H	SSR-40DA-H	SSR-P03DA
Rated Load Current	10A	25A	40A	25A	40A	3A
Input Data						
Operating Voltage	3~32VDC					
Min. ON / OFF Voltage	ON > 2.4V , OFF < 1.0V					
Trigger Current	7.5mA / 12V					
Control Method	Zero Cross Trigger					
Output Data						
Operating Voltage	24~380VAC			90~480VAC		24~380VAC
Min. Black Voltage	600 VAC < Repetive >					
Voltage Drop	1.6 V / 25 C					
Max. Durated Current	135A	275A	410A	275A	410A	135A
Leakage Current	3.0mA	3.0mA	3.0mA	5.0mA	5.0mA	3.0mA
Response Time	ON < 10ms , OFF < 10ms					
General Data						
Dielectric Strength	Over 2.5KVAC / 1min.					
Isolation Strength	Over 50MΩ / 500VDC					
Operating Temperature	-20 C ~+80 C					
Housing Material	Intensive ABS					
Weight	Appr. 105g					Appr. 15g
Connection Diagram						



FOTEK SSR SERIES HIGH CURRENT DC TO AC SOLID STATE RELAY

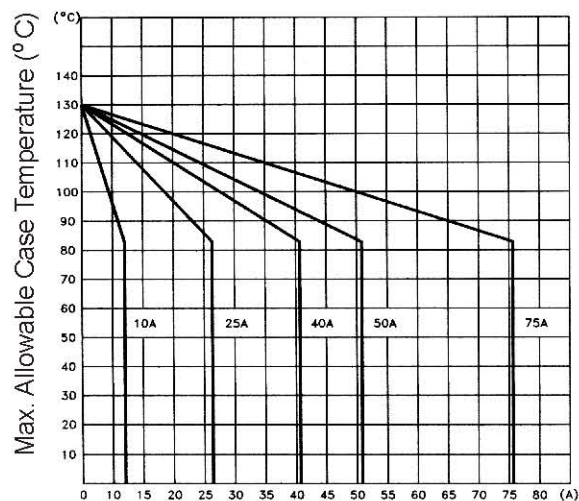
■ Specification

Type	Terminal Type			
Model	SSR-50DA	SSR-75DA	SSR-50DA-H	SSR-75DA-H
Rated Load Current	50A	75A	50A	75A
Input Data				
Operating Voltage	3~32VDC			
Min. ON / OFF Voltage	ON>2.4V , OFF<1.0V			
Trigger Current	7.5mA / 12V			
Control Method	Zero Cross Trigger			
Operating Data				
Operating Voltage	24~380VAC		90~480VAC	
Min. Blocking Voltage	600 VAC<Repetitive>			
Voltage Drop	1.6V / 25℃			
Max. Duratde Current	550A	820A	550A	820A
Leakage Current Max.	6.0mA	6.0mA	6.0mA	6.0mA
Response Time	ON<10ms , OFF<10ms			
General Data				
Dielectric Strength	Over 2.5KVAC/1min.			
Isolation Strength	Over 50M Ω/ 500VDC			
Operating Temperature	-20℃ ~+80℃			
Housing Material	Intensive ABS			
Weight	Appr.125g			
Connection Diagram/Dimension				
				

Curve of Characteristic

Max. Allowable Case Temperature

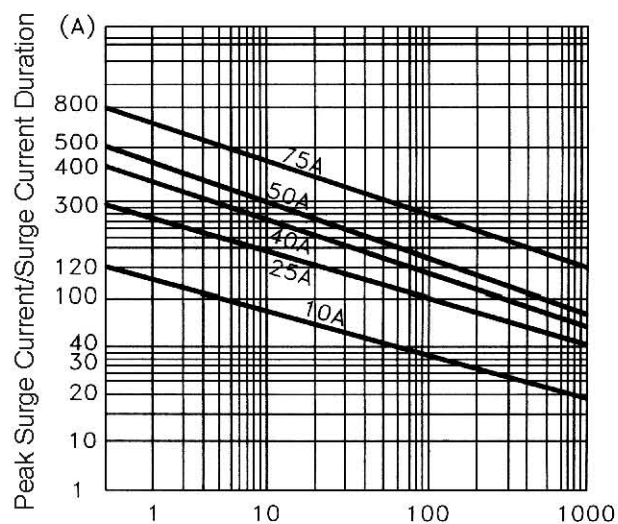
最高容許表面溫度



ON State Current (A) 動作電流

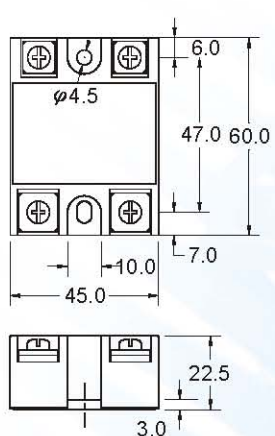
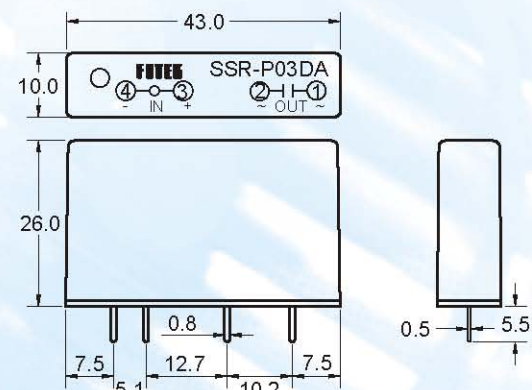
Peak Surge Current/Surge Current Duration

衝擊電流／承受次數



Surge Current Duration (Full cycles)

Dimension

Terminal Type	PCB Type
 Terminal Type dimensions: The terminal block has a width of 45.0 mm and a height of 60.0 mm. The top section has a width of 10.0 mm and a height of 7.0 mm. The bottom section has a width of 3.0 mm and a height of 22.5 mm. The terminal diameter is $\phi 4.5$ mm.	 PCB Type dimensions: The PCB has a width of 43.0 mm and a height of 26.0 mm. The terminal pitch is 12.7 mm. The terminal width is 7.5 mm. The terminal height is 5.1 mm. The terminal spacing is 10.2 mm. The terminal width is 0.8 mm. The terminal height is 5.5 mm. The terminal width is 0.5 mm.

Dimension < Heat Sink >

