

LP-Ex-15Pro

## Water Level Transmitter

High Precision , Isolation circuit board

Strong anti-interference

304 or 316L stainless steel shell



### PRODUCT PARAMATER



### Data Sheet



**Quick response**  
6-8ms(ms) instantaneous  
pressure response



**Triple protection**  
Reverse connection protection  
over voltage protection  
over current protection



**Matching degree is high**  
Standard analog output to  
support various types of  
industrial control equipment



**Waterproof and dustproof**  
IP68 grade, suitable for  
all kinds of site

### PRODUCT ADVANTAGE



#### Strong signal stability

- Product sealing is very good
- Signal stability is good

#### High quality protective housing

- Full metal armor
- High strength steel tube structure



#### ✓ Level monitoring

Level transmitter

+


Display meter



## LP-Ex-15Pro

### PRODUCT PARAMATER

### Size

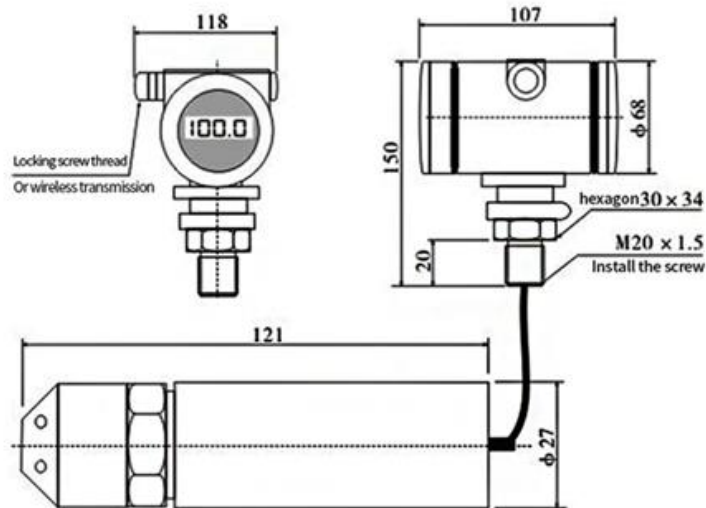

( Units: mm )

### Selection Table

Product Series						
HDL600						
Measuring range						
Selection between 0-500 meters						
Accuracy Level						
A1:0.1%F.S、 A2:0.25%F.S (standard)						
Power Supply Mode						
B1:12-36VDC、 B2:3V-5VDC						
Signal Output						
C1: 4~20mA (2-wire) 、 C2: 0-5V (3-wire) C3: 0-10V (3-wire) 、 C4: RS485 (4-wire) C5: Others						
Display						
D1:NONE D2:LED D3:LCD						
Installation mode						
E1: G1 Thread (standard) E2: Flange						
HDL600 - 5m - A1 - B1 - C1 - D1 - E1 Eg: HDL600 - 5m - A1 - B1 - C1 - D1 - E1						



### PRODUCT PROCESS



### PRODUCT APPLICATION

