

SE-DP-Series-B



PRODUCT PARAMATER



Variety of Specifications



SE-DP-Series-B


PRODUCT ADVANTAGE



Basic Parameter

Product Name	Pressure Transmitter
Measured medium	liquid, gas, vacuum, oil, etc.
Accuracy level	0.1%, 0.25% (default)
Stability	0.1%F.S
Measurement range	-100KPA ~+100MPA interval optional
Output signal	4-20mA (default), 0-10V, 0-5V
Power supply voltage	9-36VDC (default), 5VDC, 3.3VDC
Communication output	RS485, 4-20MA+HART
Installation interface	M20*1.5 (default), G1/4, G1/2, etc.
Operating temperature	-20~+70°C
Storage temperature	-40~+120°C
Overload limit	1.5 times rated range (Customized higher)
Load resistance	≤600Ω
Isolation diaphragm	316L stainless steel

Selection table								
Product Number								
SE-DP-Series-B								
Pressure range								
Please select from the list below								
Pressure type								
A: gauge pressure, G: absolute pressure								
Accuracy level								
E1: 0.1% F.S, E2: 0.25% F.S (default)								
Display method								
Mo: None, M1: LED digital display, M2: LCD liquid crystal display								
Threaded connection								
A1: M20*1.5 (default), A2: 1/2 NPT, A3: G1/2, A4: Other								
Electrical connections								
N1: Hessmann connector, N2: waterproof direct lead								
Power supply								
D1: 9-36VDC (default), D2: 3.3VDC, D3: 5VDC								
Output signal								
F1: 4~20mA (two lines), F2: 0-5V (three lines) F3: 0-10V (three lines), F4: RS485 (four lines) F5: Other								
SE-DP	-A	E1	M0	A1	N1	D1	F1	
Selection example : SE-DP-01-A-E1-M0-A1-N1-D1-F1-B								

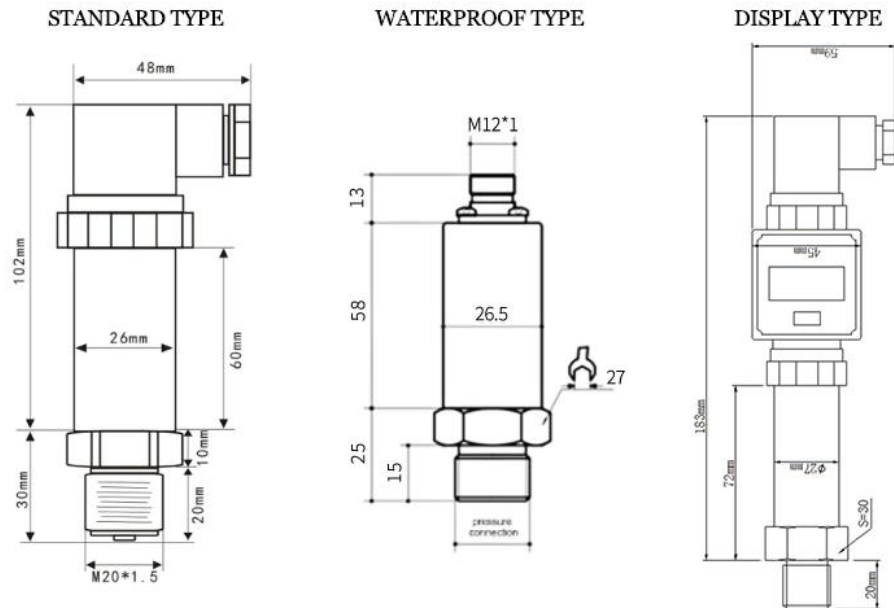

Note: Due to the different specifications of the thread, the height is not the same, the overall height will be different, please refer to the actual size after the selection.(Unit: mm)

